



YOUR PARTNER IN POWER



ISO 9001:2008
FM 56710


JET GENERATORS ARE ASSEMBLED
IN FACILITIES CERTIFIED ISO 9001

C10A Enclosures

C10A - TECHNICAL DATA

| GENSET MODEL | TOTAL LENGTH TL (A) | TOTAL WIDTH TW (B) | TOTAL HEIGHT TH (C) | WEIGHT kg | SOUND LEVELS - NO LOAD | | SOUND LEVELS - 75% LOAD | |
|-------------------|---------------------|--------------------|---------------------|-----------|------------------------|----|-------------------------|----|
| | | | | | 1M | 3M | 1M | 3M |
| JP250 1506 Series | 608 | 160 | 265 | 3000 | 69 | 67 | 71 | 69 |
| JP300 1506 Series | 640 | 180 | 280 | 3500 | 69 | 67 | 71 | 69 |
| JP350 | 676 | 204 | 287 | 4000 | 69 | 67 | 71 | 69 |
| JP400 | 676 | 204 | 287 | 4000 | 69 | 67 | 71 | 69 |
| JP450 | 676 | 204 | 287 | 4000 | 71 | 69 | 73 | 71 |
| JP500 | 676 | 204 | 287 | 4000 | 71 | 69 | 73 | 71 |
| JP600 | 700 | 215 | 252+70 | 5100 | 71 | 69 | 73 | 71 |
| JP650 | 700 | 215 | 252+70 | 5100 | 71 | 69 | 73 | 71 |
| JP750 | 726 | 228+20 | 253+75 | 5400 | 76 | 74 | 78 | 76 |
| JP800 | 726 | 228+20 | 253+75 | 5400 | 76 | 74 | 78 | 76 |
| JP1000 | 725 | 228+20 | 253+100 | 5500 | 84 | 81 | 86 | 83 |
| JP1250 | 850 | 228+20 | 300+95 | 6500 | 84 | 82 | 86 | 84 |
| JP1500 | 910 | 260 | 300+95 | 7000 | 84 | 82 | 86 | 84 |
| JP1750 | 910 | 265 | 300+95 | 7000 | 86 | 84 | 88 | 86 |
| JP2000 | 1050 | 330 | 387+100 | 14250 | 86 | 84 | 88 | 86 |

**Weight for enclosure only

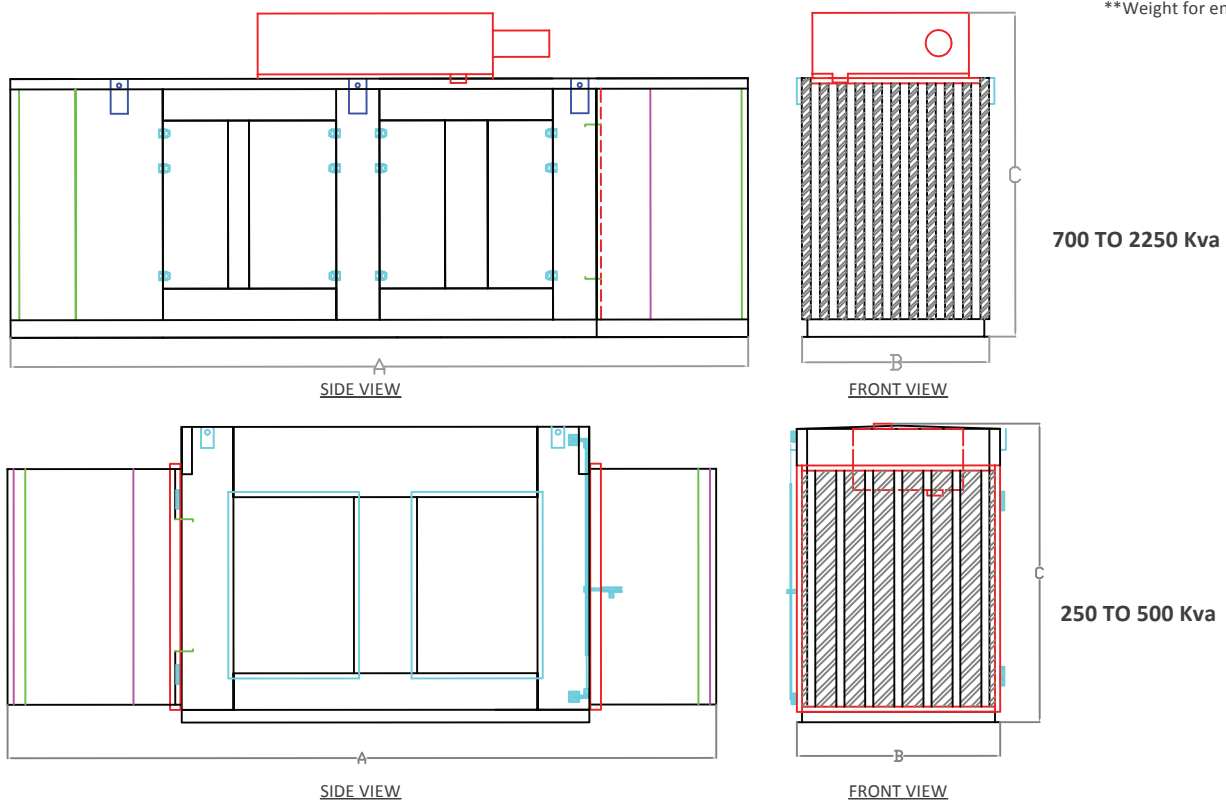

TECHNICAL SPECIFICATIONS

- Unique appearance with high sound absorbing and thermal properties
- Full weather proof enclosure and suitable operations in harsh conditions.
- Manufactured from galvanized metal sheet for doors & louvers.
- Heavy duty acoustical fireproof fiber used for general, thermal, and acoustic insulation, covered with galvanised perforated sheet for protection.
- Residential exhaust muffler to further decrease the sound level of the exhaust (mounted inside the enclosure up to 200 KVA as standard).
- Galvanized hinges & door locks / stainless steel door locks for 800 KVA as above.
- Polyurethane paint with resistant to sun radiations and various weather conditions.
- Internal emergency stop is standard with optional external emergency stop.
- Fully guarded cooling fan & battery charging alternator.
- Securely reachable fuel fill & battery via lockable access doors.
- Four lifting points for each set and 6 lifting points for 800 KVA & above for easy mobility.

All information in this document is substantially correct at time of printing and maybe altered subsequently.



Beever Company Inc., Monrovia, Liberia
Tel: +231-555-555-000
www.Beever.com