

SCREWDRIVERS & HEX KEY & BITS

- Screwdriver
- Insulated Screwdriver
- Nut Spinner
- Bit
- Ratchet Screwdriver
- Power Driving
- Hex Key
- Bicycle Repair Tool
- L-type & T-type Wrench
- Wing & Flag Handle torx Screwdriver



Screwdriver

- Shank material - SNCM - V alloy steel
- Grip material - PP +TPR
- Finishing - chrome plated with black tip

KT No. & D1



1421

- Phillips head, round shank
- DIN ISO 8764

KT NO.	⊕ No.	mm		mm	g	mm	No. of pieces
		mm	inch				
14210023	PH0	60	2-3/8	3.2	35	12 / 144	
14210132	PH1	80	3-1/8	4.5	57	12 / 96	
14210104	PH1	100	4	4.5	59	12 / 96	
14210214	PH2	38	1-1/2	6.5	44	12 / 144	
14210204	PH2	100	4	6.0	84	12 / 96	
14210206	PH2	150	6	6.0	95	12 / 144	
14210306	PH3	150	6	8.0	142	12 / 144	

KT NO.	⊕ No.	mm		mm	g	mm	No. of pieces
		mm	inch				
14210112	PH1	300	12	4.5	85	12 / 96	
14210212	PH2	300	12	6.0	127	12 / 96	
14210116	PH1	400	16	4.5	93	12 / 96	
14210216	PH2	400	16	6.0	150	12 / 96	



xx12
1421xx16

1422

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm		mm		mm	g	mm	No. of pieces
	mm	inch	mm	inch				
14220303	3	1/8	0.5	75	3	3.2	38	12 / 144
14220404	4	5/32	0.8	100	4	4.0	56	12 / 96
14220503	5	3/16	0.8	75	3	5.0	60	12 / 96
14220504	5	3/16	0.8	100	4	5.0	62	12 / 96
14225503	5.5	7/32	1.0	75	3	5.0	71	12 / 96
14225504	5.5	7/32	1.0	100	4	5.0	75	12 / 96
14225505	5.5	7/32	1.0	125	5	5.0	78	12 / 144
14225506	5.5	7/32	1.0	150	6	5.0	82	12 / 144
14226514	6.5	1/4	1.2	38	1-1/2	6.5	44	12 / 144
14226504	6.5	1/4	1.2	100	4	6.0	84	12 / 96
14226506	6.5	1/4	1.2	150	6	6.0	94	12 / 144
14220806	8	5/16	1.2	150	6	8.0	141	12 / 144
14220807	8	5/16	1.2	175	7	8.0	153	12 / 144
14220808	8	5/16	1.2	200	8	8.0	163	12 / 144
14221008	10	3/8	1.6	200	8	10.0	212	12 / 72

KT NO.	mm		mm		mm	g	mm	No. of pieces
	mm	inch	mm	inch				
14220512	5	3/16	0.8	300	12	5	94	12 / 96
14220516	5	3/16	0.8	400	16	5	109	12 / 96
14226512	6.5	1/4	1.2	300	12	6	127	12 / 96
14226516	6.5	1/4	1.2	400	16	6	150	12 / 96



1422xx12
1422xx16

Screwdriver

- Shank material - SNCM - V alloy steel
- Grip material - PP +TPR
- Finishing - chrome plated with black tip

KT No. & D1



1423



- For torx head screw, round shank



14232010, 14232510, 14233010 at the dashboard, car body, engine compartment as well as in industry.

KT NO.	Size	mm		mm	g	kg
		mm	inch			
14230602	T6	48	2	3.2	35	12 / 144
14230702	T7	48	2	3.2	35	12 / 144
14230803	T8	75	3	3.2	38	12 / 144
14230903	T9	75	3	3.2	38	12 / 144
14231003	T10	75	3	3.2	38	12 / 144
14231503	T15	75	3	4.0	55	12 / 144
14231510	T15	250	10	5.0	86	12 / 96
14232004	T20	100	4	5.0	63	12 / 144
14232010	T20	250	10	5.0	86	12 / 96
14232504	T25	100	4	6.0	83	12 / 144
14232510	T25	250	10	6.0	117	12 / 96
14232704	T27	100	4	6.0	83	12 / 144
14233005	T30	125	5	6.0	89	12 / 144
14233010	T30	250	10	6.0	118	12 / 96
14234006	T40	150	6	8.0	142	12 / 144

1427



- For torx head screw, round shank
- Tamper resistant type



KT NO.	Size	mm		mm	g	kg
		mm	inch			
14270803	T8H	75	3	3.2	38	12 / 144
14270903	T9H	75	3	3.2	38	12 / 144
14271003	T10H	75	3	3.2	38	12 / 144
14271503	T15H	75	3	4.0	55	12 / 144
14272004	T20H	100	4	5.0	53	12 / 144
14272504	T25H	100	4	6.0	83	12 / 144
14272704	T27H	100	4	6.0	83	12 / 144
14273005	T30H	125	5	6.0	89	12 / 144
14274006	T40H	150	6	8.0	142	12 / 144

1424



- Square head



KT NO.	Size	mm		mm	g	kg
		mm	inch			
14240105	RB1	125	5	5	61	20 / 240
14240204	RB2	100	4	6	76	12 / 144
14240206	RB2	150	6	6	89	12 / 144

1428



- Pozidriv head, round shank
- DIN ISO 8764



KT NO.	No.	mm		mm	g	kg
		mm	inch			
14280023	PZ0	60	2-3/8	3.2	37	12 / 96
14280132	PZ1	80	3-1/8	4.5	56	12 / 96
14280104	PZ1	100	4	4.5	60	12 / 96
14280204	PZ2	100	4	6.0	84	12 / 96
14280306	PZ3	150	6	8.0	141	12 / 144



Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip



KT NO.	PC.	Contents		
31107MR	7	 1421 PH0 x 60, PH1 x 80, PH1 x 100, PH2 x 38, PH2 x 100, PH2 x 150, PH3 x 150	0.7	1 / 20
30118MR	8	 1422 3 x 75, 5 x 75, 5 x 100, 8 x 150, 8 x 200, 6.5 x 100, 6.5 x 150, 6.5 x 38	0.9	1 / 20
30115MR	5	 1421 PH1 x 80, PH2 x 100	0.54	1 / 20
		 1422 4 x 100, 5.5 x 125, 6.5 x 150		
31116MR	6	 1421 PH0 x 60, PH1 x 80, PH2 x 100	0.56	1 / 20
		 1422 3 x 75, 5.5 x 100, 6.5 x 150		
31216MR	6	 1421 PH1 x 80, PH2 x 100	0.65	1 / 20
		 1422 5 x 75, 5 x 100, 6.5 x 100, 6.5 x 150		
30117MR	7	 1421 PH1 x 80, PH2 x 100	0.77	1 / 20
		 1422 3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175		
33108MR	8	 1421 PH0 x 60, PH1 x 100, PH2 x 100, PH2 x 38	1.3	1 / 10
		 1422 3 x 75, 5.5 x 100, 6.5 x 38, 6.5 x 100		
30127MR	7	 1421 PZ1 x 80, PZ2 x 100, PZ3 x 150	0.82	1 / 20
		 1422 4 x 100, 5.5 x 125, 6.5 x 150, 8 x 175		
30315PR	5	 1423 T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125	0.37	1 / 20
 30316PR	6	 1423 T10 x 75, T15 x 75, T20 x 100, T25 x 100, T30 x 125, T40 x 150	0.48	1 / 20
30317PR	7	 1423 T10 x 75, T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125, T40 x 150	0.78	1 / 20
30319PR	9	 1423 T8 x 75, T9 x 75, T10 x 75, T15 x 75, T20 x 100, T25 x 100, T27 x 100, T30 x 125, T40 x 150	0.88	1 / 20
30307PR	7	 1423 T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	0.78	1 / 20
30309PR	9	 1423 T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	0.88	1 / 20

Screwdriver & Set

- Shank material - S2 alloy steel
- Grip material - PP +TPR
- Finishing - Magnet chrome plated with black tip

14A1 new

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm		inch		mm	g	kg
		mm	inch	mm	inch			
14A10132	PH1	80	3-1/8	5	60	12 / 96		
14A10214	PH2	38	1-1/2	6	45	12 / 144		
14A10204	PH2	100	4	6	88	12 / 96		
14A10306	PH3	150	6	8	144	12 / 144		



14A2 new

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm		inch		mm	g	kg	
	mm	inch	mm	inch				
14A20303	3	1/8	0.6	75	3	3.0	37	12 / 144
14A20404	4	5/32	0.8	100	4	4.0	56	12 / 96
14A25504	5.5	5/32	1.0	100	4	5.5	82	12 / 96
14A25505	5.5	7/32	1.0	125	5	5.5	86	12 / 144
14A26514	6.5	1/4	1.2	38	1-1/2	6.5	47	12 / 144
14A26506	6.5	1/4	1.2	150	6	6.5	105	12 / 144
14A20808	8	5/16	1.6	200	8	8.0	166	12 / 144



14A8 new

- Pozidriv head, round shank
- DIN ISO 8764

KT NO.	No.	mm		inch		mm	g	kg
		mm	inch	mm	inch			
14A80132	PZ1	80	3-1/8	5	60	12 / 96		
14A80204	PZ2	100	4	6	89	12 / 96		



KT NO.	PC.	Contents	g	kg
new 30106AMRB	6	14A1 — PH1 x 80, PH2 x 100	0.56	1 / 12
		14A2 — 3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		
new 30116AMRB	6	14A8 — PZ1 x 80, PZ2 x 100	0.56	1 / 12
		14A2 — 3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		
new 30107AMRB	7	14A1 — PH1 x 80, PH2 x 100, PH3 x 150	0.82	1 / 12
		14A2 — 3 x 75, 4 x 100, 5.5 x 125, 6.5 x 150		



Screwdriver

- Shank material - Chrome vanadium alloy steel
- Finishing - chrome plated
- Grip material - PP

KT No. & D1



1411

- Phillips head, round shank
- DIN ISO 8764

KT NO.	No.	mm		mm	g	kg	No. / Box
		mm	inch				
14110003	PH0	75	3	3	27		12 / 240
14110104	PH1	100	4	5	40.8		12 / 240
14110214	PH2	38	1-1/2	6	30		12 / 144
14110204	PH2	100	4	6	70		12 / 96
14110204-E*	PH2	100	4	6	84		12 / 96
14110205-E*	PH2	125	5	6	114		12 / 144
14110206	PH2	150	6	6	82		12 / 144
14110206-E*	PH2	150	6	6	96		12 / 144
14110208-E*	PH2	200	8	6	137		12 / 144
14110306	PH3	150	6	8	126		12 / 144
14110308	PH3	200	8	8	146		12 / 144

* Enlarged handle



1412

- Slotted head, round shank
- DIN ISO 2380

KT NO.	mm		mm		mm	g	kg	No. / Box
	mm	inch	mm	inch				
14120303	3.0	1/8	0.5	75	3	27.0		12 / 240
14120404	4.0	5/32	0.8	100	4	33.4		12 / 240
14125504	5.5	7/32	0.8	100	4	41.0		12 / 240
14126514	6.5	1/4	1.2	38	1-1/2	6	30.0	12 / 144
14126504	6.5	1/4	1.2	100	4	6	70.0	12 / 96
14126504-E*	6.5	1/4	1.2	100	4	6	107.0	12 / 96
14126506	6.5	1/4	1.2	150	6	6	79.4	12 / 144
14126506-E*	6.5	1/4	1.2	150	6	6	124.0	12 / 144
14120806	8.0	5/16	1.2	150	6	8	124.0	12 / 144
14120808	8.0	5/16	1.2	200	8	8	146.0	12 / 144

* Enlarged handle



2411

- Two-way screwdriver hex shank

KT NO.	No.	mm		mm		g	kg	No. / Box
		mm	inch	mm	inch			
24110204	PH2	7	1.2	100	4	89		20 / 240
24110214	PH2	7	1.2	38	1-1/2	42		20 / 240



24110204

24110214

Screwdriver Set


- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

KT NO.	PC.	Contents	g	kg	No. / Box
35105MR	5	1411 PH1 x 100, PH2 x 100	0.54		1 / 20
		1412 4 x 100, 5.5 x 100, 6.5 x 150			
35116MR01	6	1411 PH1 x 100, PH2 x 100, PH3 x 150	0.65		1 / 20
		1412 4 x 100, 5.5 x 100, 6.5 x 150			
35107MR	7	1411 PH1 x 100, PH2 x 100, PH3 x 150	0.72		1 / 20
		1412 4 x 100, 5.5 x 100, 6.5 x 150, 8 x 150			



- Magnet
- Chrome plated with black tip

- Color rubber handle
- Grip material - PP + TPR

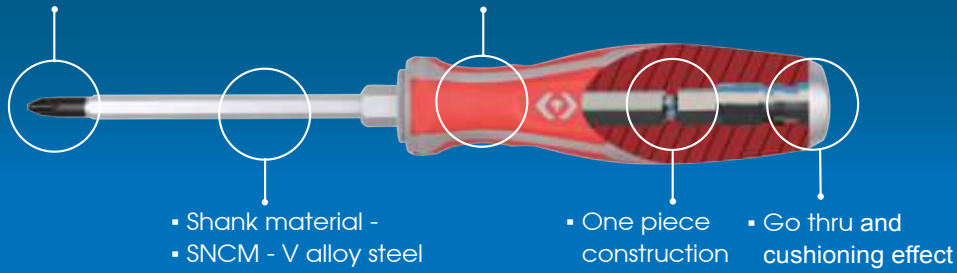

- Shank material - SNCM - V alloy steel

- One piece construction
- Go thru and cushioning effect

Go Thru Screwdriver & Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tips



Please wear proper safety gear while working.



KT No. & D1

1461

- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	⊕ No.	mm		inch		mm	Scales	Crate/Box
		mm	inch	mm	inch			
14610103	PH1	75	3	5	120	12 / 96		
14610204	PH2	100	4	6	134	12 / 96		
14610206	PH2	150	6	6	144	12 / 144		
14610306	PH3	150	6	8	219	12 / 96		



1462

- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm		inch		mm	Scales	Crate/Box	
	mm	inch	mm	inch				
14625504	5.5	7/32	1.0	100	4	5	123	12 / 96
14626504	6.5	1/4	1.2	100	4	6	134	12 / 96
14626506	6.5	1/4	1.2	150	6	6	146	12 / 144
14620806	8.0	5/16	1.2	150	6	8	219	12 / 144
14620807	8.0	5/16	1.2	175	7	8	228	12 / 96
14621008	10.0	3/8	1.6	200	8	10	310	12 / 72
new 14621012	10.0	3/8	1.6	300	12	10	378	10 / 60
14621210	12.0	15/32	2.0	250	10	10	346	10 / 40




30206MR

Contents

1.2 Kg 1 / 20

⊕ 1461 PH1 x 75, PH2 x 100, PH3 x 150

⊖ 1462 5.5 x 100, 6.5 x 150, 8.0 x 175



6 PC.

35208MR

new

Blow case size (mm) :
430 x 300 x 50 (1.29 cuft)

Contents

2.16 Kg 1 / 4

⊕ 1461 PH1 x 75, PH2 x 100, PH3 x 150

⊖ 1462 6.5 x 100, 8.0 x 175, 10 x 300

⊕ 1421 PH2 x 38

⊖ 1422 6.5 x 38



8 PC.

Go Thru Screwdriver & Set

- Shank material - S2 alloy steel
- Grip material - PP + TPR
- Finishing - Magnet chrome plated with black tip



14B1 new



- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	⊕ No.	mm		mm	g	kg	No. / Box
		mm	inch				
14B10103	PH1	75	3	5	130	12 / 96	
14B10204	PH2	100	4	6	134	12 / 96	
14B10206	PH2	150	6	6	145	12 / 144	
14B10306	PH3	150	6	8	241	12 / 96	



14B2 new



- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm		mm	inch	mm	g	kg	No. / Box
	mm	inch						
14B25504	5.5	7/32	1.0	100	4	5.5	139	12 / 96
14B26506	6.5	1/4	1.2	150	6	6.5	164	12 / 144
14B20807	8.0	5/16	1.6	175	7	8.0	252	12 / 96



30206AMRB new

6
PC.

Contents

1.2 kg 1 / 12



14B1 PH1 x 75, PH2 x 100, PH3 x 150



14B2 5.5 x 100, 6.5 x 150, 8.0 x 175



Go Thru Screwdriver

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated

1481



- Phillips head, hex-shank
- DIN ISO 8764

KT NO.	⊕ No.	mm		mm	g	kg	No. / Box
		mm	inch				
14810103	PH1	75	3	5	48	12 / 240	
14810204	PH2	100	4	6	86	12 / 144	
14810204-E*	PH2	100	4	6	130	12 / 96	
14810205	PH2	125	5	6	94	12 / 144	
14810205-E*	PH2	125	5	6	170	12 / 144	
14810306	PH3	150	6	8	170	12 / 144	
14810412	PH4	300	12	10	362	10 / 40	



* Enlarged handle

Go Thru Screwdriver & Set

- Shank material - Chrome vanadium alloy steel
- Grip material - PP
- Finishing - chrome plated



Please wear proper safety gear while working. KT No. & D1



1482

- Slotted head, hex-shank
- DIN ISO 2380

KT NO.	mm		inch		mm	mm	mm	mm	mm
	mm	inch	mm	inch					
14825503	5.5	7/32	0.8	75	3	5	50	12 / 240	
14826504	6.5	1/4	1.2	100	4	6	88	12 / 144	
14826504-E*	5.5	1/4	1.2	100	4	6	130	12 / 96	
14826505-E*	6.5	1/4	1.2	125	5	6	170	12 / 144	
14826506	6.5	1/4	1.2	150	6	6	120	12 / 144	
14820806	8.0	5/16	1.2	150	6	8	169	12 / 144	
14821012	10.0	12/32	1.6	300	12	10	322	10 / 40	

* Enlarged handle



36206MR


Contents

0.97 Kg 1 / 20

⊕ 1481 PH1 x 75, PH2 x 100, PH3 x 150

⊖ 1482 5.5 x 75, 6.5 x 150, 8.0 x 150

6 PC.



35114MR

35114MR01

- Standard & insulated & go thru screwdriver set

14 PC.





KT NO.	Contents		2.4 Kg 1 / 4
35114MR	⊖ 1472	6.5 x 150	⊕ 1411 PH0 x 75, PH1 x 100, PH2 x 100, PH2 x 150, PH2 x 38, PH3 x 150 ⊖ 1412 3 x 75, 4 x 100, 5.5 x 100, 6.5 x 150, 6.5 x 38, 8 x 200 ⊖ 1482 10 x 300
35114MR01	⊕ 1478	PZ2 x 100	

Screwdriver Set

31416MR

Standard screwdriver set

KT NO.	Contents	Each Q'ty
31416MR	 1421 PH0 x 60, PH1 x 80, PH1 x 100, PH2 x 38, PH2 x 100, PH2 x 150, PH3 x 150	6
	 1422 3.0 x 75, 4.0 x 100, 5.5 x 75, 5.5 x 100, 5.5 x 125, 6.5 x 38, 6.5 x 100, 6.5 x 150, 8.0 x 150	






96
PC.

Screwdriver shelf size (mm) : 600 x 240 x 210

KT NO.	Kg	CUFT
31416MR-A	3.3	1.97
31416MR-D	6.2	0.71

31516MR

Standard & go thru screwdriver set

KT NO.	Contents	Each Q'ty
31516MR	 1427 T8H x 75, T9H x 75, T10H x 75, T15H x 75, T20H x 100, T25H x 100, T27H x 100, T30H x 125, T40H x 150	6
	 1461 PH1 x 75, PH2 x 100, PH3 x 150	
	 1462 5.5 x 100, 6.5 x 100, 6.5 x 150, 8.0 x 175	





96
PC.

Screwdriver shelf size (mm) : 600 x 240 x 210

KT NO.	Kg	CUFT
31516MR-A	3.3	1.97
31516MR-D	10.1	0.71

31519MR

Standard Screwdriver set

KT NO.	Contents	Each Q'ty
31519MR	 1411 PH0 x 75, PH1 x 100, PH2 x 100, PH2 x 100E*, PH2 x 150, PH2 x 150E*, PH2 x 38, PH3 x 150, PH3 x 200	6
	 1412 3.0 x 75, 4.0 x 100, 5.5 x 100, 6.5 x 100, 6.5 x 150, 6.5 x 100E*, 6.5 x 38, 8 x 150, 8 x 200, 6.5 x 150E*	

* Enlarged handle











114
PC.

Screwdriver shelf size (mm) : 650 x 250 x 210

KT NO.	Kg	CUFT
31519MR-A	3.5	1.97
31519MR-D	10.34	0.71

31512MR

Standard & go thru screwdriver set

KT NO.	Contents	Each Q'ty
31512MR	 1481 PH2 x 125  1482 6.5 x 150	6
	 24110204 PH2 x 100  24110214 PH2 x 38	
31512MR01	 1481 PH2 x 125E*  1482 6.5 x 125E*	6
	 1481 PH2 x 100, PH1 x 75, PH2 x 100E*, PH3 x 150  1482 5.5 x 75, 6.5 x 100, 6.5 x 100E*, 8 x 150	

31512MR01



72
PC.

Screwdriver shelf size (mm) : 420 x 250 x 210

KT NO.	Kg	CUFT
31512MR-A	2.47	0.78
31512MR-D	8.23	0.71
31512MR01-A	3.5	1.50
31512MR01-D	7.86	0.38

Screwdriver Display

87104

- Overall size -W 325 x D 205 x H 270 mm
- Weight - 1.2 Kg / Cuff - 0.3



Reversible Handle

91232



KT NO.

mm inch



91232

135

5-1/4

84


12 / 144

Power Bit

1317

- Bits for screwdriver handle 91232
- Material - SNCM - V alloy steel

KT NO.	Size	mm	inch		
1317012PN	⊕ PH1 ⊕ PH2	175	7	45	40 / 400
1317012ZN	⊕ PZ2 ⊕ PZ1	175	7	45	40 / 400
1317046SN	⊖ 4.0 ⊖ 6.0	175	7	45	40 / 400
1317057SN	⊖ 5.0 ⊖ 7.0	175	7	45	40 / 400
1317115TN	⊛ T10 ⊛ T15	175	7	45	40 / 400
1317225TN	⊛ T20 ⊛ T25	175	7	45	40 / 400
1317340TN	⊛ T30 ⊛ T40	175	7	45	40 / 400
1317401PN	⊖ 4.0 ⊕ PH1	175	7	45	40 / 400
131744BHN	● B4 ● H4	175	7	45	40 / 400
1317501ZN	⊖ 5.0 ⊕ PZ1	175	7	45	40 / 400
131755BHN	● B5 ● H5	175	7	45	40 / 400
1317602PN	⊖ 6.0 ⊕ PH2	175	7	45	40 / 400
131766BHN	● B6 ● H6	175	7	45	40 / 400
1317702ZN	⊖ 7.0 ⊕ PZ2	175	7	45	40 / 400

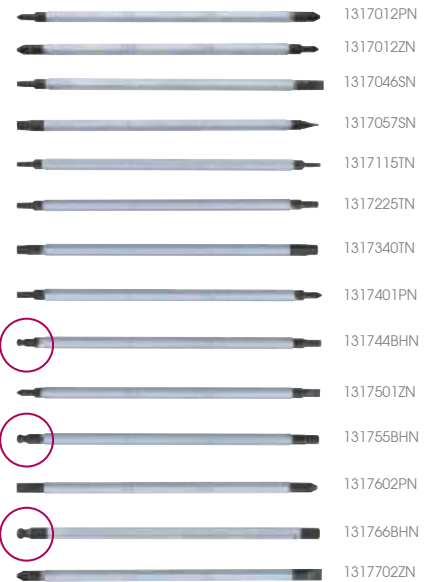

Screwdriver Set

32518MR

- Two-way screwdriver set

Contents



0.7



1 / 20

1317012PN	⊕ PH1		⊕ PH2
1317012ZN	⊕ PZ2		⊕ PZ1
1317046SN	⊖ 4.0		⊖ 6.0
1317057SN	⊖ 5.0		⊖ 7.0
1317115TN	⊛ T10		⊛ T15
1317225TN	⊛ T20		⊛ T25
1317340TN	⊛ T30		⊛ T40
131744BHN	● B4		● H4
131755BHN	● B5		● H5
131766BHN	● B6		● H6
91232			

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Shank finishing - chrome plated

11
PC.



Blow case size (mm) : 233 x 120 x 43 (0.04cuff)

Screwdriver Set

32518MR01

▪ Two-way screwdriver set



11
PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuff)

Contents	0.76	1 / 20
1317115TN	T10	T15
1317225TN	T20	T25
1317340TN	T30	T40
1317401PN	4.0	PH1
131744BHN	B4	H4
1317501ZN	5.0	PZ1
131755BHN	B5	H5
1317602PN	6.0	PH2
131766BHN	B6	H6
1317702ZN	7.0	PZ2
91232		

32518MR02

▪ Two-way screwdriver set



11
PC.

Blow case size (mm) : 233 x 120 x 43 (0.04cuff)

Contents	0.7	1 / 20
1317115TN	T10	T15
1317225TN	T20	T25
1317340TN	T30	T40
1317401PN	4.0	PH1
131744BHN	B4	H4
1317012PN	PH1	PH2
131755BHN	B5	H5
1317602PN	6.0	PH2
131766BHN	B6	H6
1317057SN	5.0	7.0
91232		

Nut Spinner

- Shank material - chrome vanadium alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated

1450



KT NO.	mm	mm	mm	mm		
1450-04	4.0	4.5	125	225	74	12 / 144
1450-05	4.5	4.5	125	225	76	12 / 144
1450-05	5.0	5.0	125	225	75	12 / 144
1450-55	5.5	5.0	125	225	81	12 / 144
1450-06	6.0	6.0	125	225	81	12 / 144
1450-07	7.0	6.0	125	235	103	12 / 144
1450-08	8.0	7.0	125	235	108	12 / 144
1450-09	9.0	7.0	125	235	110	12 / 144
1450-10	10.0	8.0	125	235	114	12 / 144
1450-11	11.0	9.0	125	245	166	12 / 144
1450-12	12.0	10.0	125	245	168	12 / 144
1450-13	13.0	10.0	125	245	173	10 / 120

5450



KT NO.	inch	mm	mm	mm		
5450-08	1/4	12.0	125	223	80	12 / 144
5450-10	5/16	8.2	125	223	105	12 / 144

Flexible Nut Spinner

1453

KT NO.	mm	mm	mm	mm		
1453-05	5	14.3	190	300	136	12 / 144
1453-06	6	14.1	190	300	135	12 / 144
1453-07	7	14.5	190	300	134	12 / 144
1453-08	8	13.2	190	300	133	12 / 144
1453-10	10	12.7	190	300	132	12 / 144

▪ For the hose clamps on radiator hoses



Insulated Screwdriver

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip



KT No. & D1

1471

- Phillips head, round shank
- IEC 60900:2004

KT NO.	⊕ No.	mm		mm	g	mm	mm
		mm	inch				
14710003	PH0	75	3	3.0	37	12 / 144	
14710104	PH1	100	4	4.5	54	12 / 216	
14710204	PH2	100	4	6.0	77	12 / 144	
14710306	PH3	150	6	8.0	135	12 / 144	



1472

- Slotted head, round shank
- IEC 60900:2004

KT NO.	mm		mm	mm	mm	g	mm	mm
	mm	inch						
14720303	3	1/8	0.5	75	3	3.0	38	12 / 144
14720404	4	3/16	0.8	100	4	4.0	44	12 / 96
new 14723504	3.5	1/8	0.6	100	4	3.5	54	12 / 144
14725505	5.5	7/32	1	125	5	5.5	72	12 / 144
14726506	6.5	1/4	1.2	150	6	6.5	87	12 / 144
14720807	8	5/16	1.2	175	7	8.0	143	12 / 144



1474

- Square head, round shank
- IEC 60900:2004

KT NO.	Size	mm		mm	g	mm	mm
		mm	inch				
14740105	RB1	125	5	5.5	72	12 / 144	
14740206	RB2	150	6	6.5	87	12 / 144	



1478

- Pozidriv head, round shank
- IEC 60900:2004

KT NO.	Size	mm		mm	g	mm	mm
		mm	inch				
14780003	PZ0	75	3	3.0	37	12 / 144	
14780104	PZ1	100	4	4.5	54	12 / 96	
14780204	PZ2	100	4	6.0	77	12 / 144	
14780306	PZ3	150	6	8.0	135	12 / 144	



Insulated Screwdriver Set

- Shank material - SNCM - V alloy steel
- Grip material - PP + TPR
- Finishing - chrome plated with black tip



KT NO.	PC.	Contents	0.86 kg	1 / 20
30607MR	7	⊖ 1472	4 x 100, 5.5 x 125, 6.5 x 150, 8.0 x 175	
		⊕ 1478	PZ1 x 100, PZ2 x 100, PZ3 x 150	
30607MR02	7	⊕ 1471	PH1 x 100, PH2 x 100	
		⊖ 1472	4 x 100, 5.5 x 125, 6.5 x 150	
		⊖ 1474	1 x 125, 2 x 150	
30617MR	7	⊕ 1471	PH1 x 100, PH2 x 100, PH3 x 150	
		⊖ 1472	4 x 100, 5.5 x 125, 6.5 x 150, 8.0 x 175	



KT NO.	PC.	Contents	0.50 kg	1 / 30
30605MR	5	⊖ 1472	4 x 100, 5.5 x 125, 6.5 x 150	
		⊕ 1478	PZ1 x 100, PZ2 x 100	
30615MR	5	⊕ 1471	PH1 x 100, PH2 x 100	
		⊖ 1472	4 x 100, 5.5 x 125, 6.5 x 150	

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted
- Total length : 25 mm

1/4" Hex size shank driver



order unit : one box

Item No. xxxxxxx.B

1025P

- DIN ISO 2351-2

KT NO.	⊕ No.	⚖	📦 / 📦
102500P (102500P.B)	PH0	5	20 / 200 (50 / 1000)
102501P (102501P.B)	PH1	5	
102502P (102502P.B)	PH2	6	
102503P (102503P.B)	PH3	6	
102504P (102504P.B)	PH4	6	

102512P

- Reduced for dry-wall

- DIN ISO 2351-2

KT NO.	⊕ No.	⚖	📦 / 📦
102512P (102512P.B)	PH2	6	20 / 200 (50 / 1000)

1025S

- DIN ISO 2351-1

KT NO.	Tip width (mm)	Tip thickness (mm)	⚖	📦 / 📦
102503S1 (102503S1.B)	3.0	0.5	5	20 / 200 (50 / 1000)
102535S1 (102535S1.B)	3.5	0.6	5	
102504S1 (102504S1.B)	4.0	0.5	5	
102504S2 (102504S2.B)	4.0	0.8	5	
102545S1 (102545S1.B)	4.5	0.6	5	
102505S1 (102505S1.B)	5.0	0.8	5	
102555S1 (102555S1.B)	5.5	0.8	5	
102555S2 (102555S2.B)	5.5	1.0	5	
102506S1 (102506S1.B)	6.0	1.0	5	
102565S1 (102565S1.B)	6.5	1.2	6	
102507S1 (102507S1.B)	7.0	1.2	6	
102508S1 (102508S1.B)	8.0	1.2	6	
102508S2 (102508S2.B)	8.0	1.6	6	

1025H 5025H

- DIN ISO 2351-3

KT NO.	mm	⚖	📦 / 📦
102515H (102515H.B)	H1.5	4	20 / 200 (50 / 1000)
102502H (102502H.B)	H2	5	
102525H (102525H.B)	H2.5	5	
102503H (102503H.B)	H3	5	
102504H (102504H.B)	H4	6	
102505H (102505H.B)	H5	6	
102506H (102506H.B)	H6	6	
102507H (102507H.B)	H7	8	
102508H (102508H.B)	H8	9	
102510H (102510H.B)	H10	12	

KT NO.	inch	⚖	📦 / 📦
502503H (502503H.B)	3/64	4	20 / 200 (50 / 1000)
502504H (502504H.B)	1/16	4	
502505H (502505H.B)	5/64	5	
502506H (502506H.B)	3/32	5	
502507H (502507H.B)	7/64	5	
502508H (502508H.B)	1/8	5	
502509H (502509H.B)	9/64	5	
502510H (502510H.B)	5/32	5	

1025T

- For torx head screw

KT NO.	Size	⚖	📦 / 📦
102506T (102506T.B)	T6	5	20 / 200 (50 / 1000)
102507T (102507T.B)	T7	5	
102508T (102508T.B)	T8	5	
102509T (102509T.B)	T9	5	
102510T (102510T.B)	T10	5	
102515T (102515T.B)	T15	5	
102520T (102520T.B)	T20	5	
102525T (102525T.B)	T25	5	
102527T (102527T.B)	T27	5	
102530T (102530T.B)	T30	5	
102535T (102535T.B)	T35	6	
102540T (102540T.B)	T40	6	
102545T (102545T.B)	T45	7	
102550T (102550T.B)	T50	8	

1025U

- For torx head screw

- Tamper resistant type

KT NO.	Size	⚖	📦 / 📦
102507U (102507U.B)	T7H	4	20 / 200 (50 / 1000)
102508U (102508U.B)	T8H	5	
102509U (102509U.B)	T9H	5	
102510U (102510U.B)	T10H	5	
102515U (102515U.B)	T15H	5	
102520U (102520U.B)	T20H	5	
102525U (102525U.B)	T25H	5	
102527U (102527U.B)	T27H	5	
102530U (102530U.B)	T30H	6	
102540U (102540U.B)	T40H	6	

1025M

- DIN 65254

KT NO.	size	⚖	📦 / 📦
102504M	M4	5	20 / 200
102505M	M5	5	
102506M	M6	6	
102508M	M8	7	
102510M	M10	10	

1025V

- For inside 5-star screw

- Tamper resistant type

KT NO.	Size	⚖	📦 / 📦
102508V	IPR 8	5	20 / 200
102509V	IPR 9	5	
102510V	IPR 10	5	
102515V	IPR 15	5	
102520V	IPR 20	5	
102525V	IPR 25	5	
102527V	IPR 27	5	
102530V	IPR 30	5	
102540V	IPR 40	6	



Bit

1/4" Hex size shank driver




order unit : one blister card



Item No. xxxxxx.B

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

5/16" Hex size shank driver



order unit : one box

1025Z

- Pozidriv type
- DIN ISO 2351-2

KT NO.	No.	g	g	g
102501Z (102501Z.B)	PZ1	5		20 / 200
102502Z (102502Z.B)	PZ2	6		(50 / 1000)
102503Z (102503Z.B)	PZ3	6		

1025R

KT NO.	Size	g	g	g
102500R (102500R.B)	RB0	5		
102501R (102501R.B)	RB1	5		20 / 200
102502R (102502R.B)	RB2	6		(50 / 1000)
102503R (102503R.B)	RB3	6		

1360Z

KT NO.	No.	Overall length (mm)	g	g
1360012Z	PZ1 / PZ2	60	13	
1360022Z	PZ2 / PZ2	60	14	10 / 100
1360023Z	PZ2 / PZ3	60	14	

1360Z

KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	g
1360451Z	PZ1	4.5	0.6	60	13	
1360552Z	PZ2	5.5	1.0	60	14	10 / 100
1360703Z	PZ3	7.0	1.2	60	14	

1360P

KT NO.	No.	Overall length (mm)	g	g
1360012P	PH1 / PH2	60	13	
1360022P	PH2 / PH2	60	14	10 / 100
1360023P	PH2 / PH3	60	14	

1360P

KT NO.	No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	g
1360451P	PH1	4.5	0.6	60	13	
1360552P	PH2	5.5	0.8	60	14	10 / 100
1360703P	PH3	7.0	1.2	60	14	

1800P

- 36 / 80 / 125mmL
- DIN ISO 2251-2

KT NO.	No.	Overall length (mm)	g	g
183601P	PH1	36	12	20 / 200
183602P	PH2	36	12	20 / 200
183603P	PH3	36	12	20 / 200
183604P	PH4	36	12	20 / 200
188002P	PH2	80	31	10 / 100
188003P	PH3	80	31	10 / 100
188004P	PH4	80	31	10 / 100
181202P	PH2	125	50	10 / 100
181203P	PH3	125	50	10 / 100

1800S

- 36 / 80mmL
- DIN ISO 2351-1

KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	g
183608S	8	1.2	36	12	20 / 200
183609S	9	1.6	36	13	20 / 200
183610S	10	1.6	36	15	20 / 200
183611S	11	2.0	36	16	20 / 200
183612S	12	2.0	36	18	12 / 120
183614S	14	2.0	36	21	12 / 120
188008S	8	1.2	80	32	10 / 100
188010S	10	1.6	80	33	10 / 100
188012S	12	2.0	80	34	6 / 60

1800H

- 32 / 36 mmL

KT NO.	mm	Overall length (mm)	g	g
183203H	H3	32	9	20 / 200
183204H	H4	32	10	20 / 200
183205H	H5	32	10	20 / 200
183206H	H6	32	11	20 / 200
183207H	H7	32	12	20 / 200
183208H	H8	32	13	20 / 200
183210H	H10	32	17	20 / 200
183212H	H12	32	22	12 / 120
183604H	H4	36	11	20 / 200
183605H	H5	36	12	20 / 200
183606H	H6	36	13	20 / 200
183607H	H7	36	14	20 / 200
183608H	H8	36	15	20 / 200
183610H	H10	36	19	20 / 200
183612H	H12	36	25	12 / 120
183614H	H14	36	31	12 / 120

Bit

5/16" Hex size shank driver



order unit : one box

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

10mm Hex size shank driver



order unit : one blister card

1800T



- For torx internal screws
32 / 36 / 70 mmL



KT NO.	Size	Overall length (mm)			
183215T	T15	32	10	20	200
183220T	T20	32	10	20	200
183225T	T25	32	10	20	200
183227T	T27	32	11	20	200
183230T	T30	32	11	20	200
183240T	T40	32	11	20	200
183245T	T45	32	11	20	200
183250T	T50	32	11	20	200
183620T	T20	36	11	20	200
183625T	T25	36	11	20	200
183627T	T27	36	11	20	200
183630T	T30	36	12	20	200
183635T	T35	36	12	20	200
183640T	T40	36	13	20	200
183645T	T45	36	13	20	200
183650T	T50	36	14	20	200
183655T	T55	36	19	20	200
183660T	T60	36	22	12	120
187015T	T15	70	22	10	100
187020T	T20	70	22	10	100
187025T	T25	70	22	10	100
187027T	T27	70	22	10	100
187030T	T30	70	22	10	100
187040T	T40	70	22	10	100
187045T	T45	70	22	10	100
187050T	T50	70	22	10	100

1836Z



- 36 mmL




KT NO.	No.	Overall length (mm)			
183602Z	PZ2	36	12	20	200
183603Z	PZ3	36	12	20	200
183604Z	PZ4	36	13	20	200

1600H



- 36 / 80mmL



KT NO.	mm	Overall length (mm)			
163604H	H4	36	17	12	120
163605H	H5	36	19	12	120
163606H	H6	36	19	12	120
163607H	H7	36	20	12	120
163608H	H8	36	21	12	120
163609H	H9	36	23	12	120
163610H	H10	36	24	12	120
163612H	H12	36	31	12	120
168004H	H4	80	47	6	60
168005H	H5	80	48	6	60
168006H	H6	80	49	6	60
168007H	H7	80	50	6	60
168008H	H8	80	51	6	60
168009H	H9	80	52	6	60
168010H	H10	80	54	6	60
168012H	H12	80	73	6	60

1600T



- For torx head screw
36 / 80mmL



KT NO.	Size	Overall length (mm)			
163610T	T10	36	17	12	120
163615T	T15	36	17	12	120
163620T	T20	36	18	12	120
163625T	T25	36	18	12	120
163627T	T27	36	18	12	120
163630T	T30	36	18	12	120
163640T	T40	36	20	12	120
163645T	T45	36	21	12	120
163650T	T50	36	23	12	120
163655T	T55	36	28	12	120
163660T	T60	36	33	12	120
168010T	T10	80	46	6	60
168015T	T15	80	47	6	60
168020T	T20	80	47	6	60
168025T	T25	80	47	6	60
168027T	T27	80	47	6	60
168030T	T30	80	47	6	60
168040T	T40	80	48	6	60
168045T	T45	80	49	6	60
168050T	T50	80	50	6	60
168055T	T55	80	52	6	60
168060T	T60	80	70	6	60



Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

10mm Hex size shank driver



order unit : one blister card

1600E


- For torx Plus head screw
- 36 / 80mmL



KT NO.	Size	Overall length (mm)	Weight (g)	Length (mm)
163610E	IP10	36	15	12 / 120
163615E	IP15	36	16	12 / 120
163620E	IP20	36	16	12 / 120
163625E	IP25	36	16	12 / 120
163627E	IP27	36	17	12 / 120
163630E	IP30	36	17	12 / 120
163640E	IP40	36	18	12 / 120
163645E	IP45	36	20	12 / 120
163650E	IP50	36	21	12 / 120
163655E	IP55	36	25	12 / 120
163660E	IP60	36	31	12 / 120
168010E	IP10	80	45	6 / 60
168015E	IP15	80	45	6 / 60
168020E	IP20	80	45	6 / 60
168025E	IP25	80	46	6 / 60
168027E	IP27	80	46	6 / 60
168030E	IP30	80	47	6 / 60
168040E	IP40	80	48	6 / 60
168045E	IP45	80	49	6 / 60
168050E	IP50	80	50	6 / 60
168055E	IP55	80	60	6 / 60
168060E	IP60	80	79	6 / 60

1600U


- For torx head screw
- Tamper resistant type
- 36 / 80mmL



KT NO.	Size	Overall length (mm)	Weight (g)	Length (mm)
163610U	T10H	36	17	12 / 120
163615U	T15H	36	17	12 / 120
163620U	T20H	36	18	12 / 120
163625U	T25H	36	18	12 / 120
163627U	T27H	36	18	12 / 120
163630U	T30H	36	18	12 / 120
163640U	T40H	36	20	12 / 120
163645U	T45H	36	21	12 / 120
163650U	T50H	36	23	12 / 120
163655U	T55H	36	28	12 / 120
163660U	T60H	36	33	12 / 120
168010U	T10H	80	46	6 / 60
168015U	T15H	80	47	6 / 60
168020U	T20H	80	47	6 / 60
168025U	T25H	80	47	6 / 60
168027U	T27H	80	47	6 / 60
168030U	T30H	80	47	6 / 60
168040U	T40H	80	48	6 / 60
168045U	T45H	80	49	6 / 60
168050U	T50H	80	50	6 / 60
168055U	T55H	80	52	6 / 60
168060U	T60H	80	70	6 / 60

1600M

- 36 / 80mmL





KT NO.	Size	Overall length (mm)	Weight (g)	Length (mm)
163605M	M5	36	18	12 / 120
163606M	M6	36	19	12 / 120
163608M	M8	36	20	12 / 120
163609M	M9	36	21	12 / 120
163610M	M10	36	22	12 / 120
163612M	M12	36	28	12 / 120
163614M	M14	36	30	12 / 120
168005M	M5	80	47	6 / 60
168006M	M6	80	48	6 / 60
168008M	M8	80	49	6 / 60
168009M	M9	80	51	6 / 60
168010M	M10	80	52	6 / 60
168012M	M12	80	70	6 / 60
168014M	M14	80	71	6 / 60

Bit Display Box

87352

- Overall size - W 318 x D 235 x H 183 mm
- Weight - 1.3 Kg / Cufft - 0.4

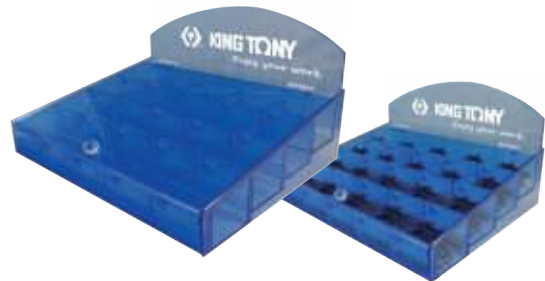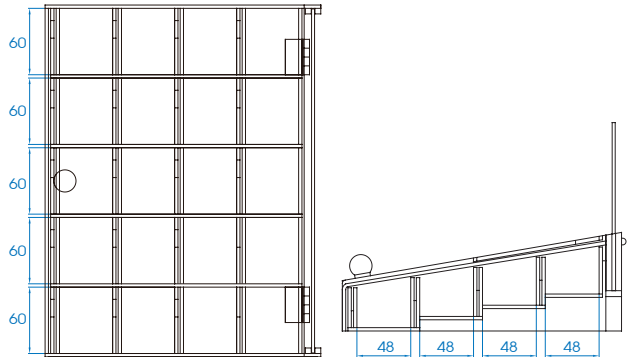

Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1011MQ

Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)



11
PC.

Contents 0.82 1 / 20

	1636M	M5, M6, M8, M10, M12
	1680M	M5, M6, M8, M10, M12
	414810M	

1015MQ

Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)



15
PC.

Contents 0.96 1 / 20

	1636H	H4, H5, H6, H7, H8, H10, H12
	1680H	H4, H5, H6, H7, H8, H10, H12
	414810M	

1015PQ

Metal case size (mm) : 198 x 105 x 37 (0.027 cuft)



15
PC.

Contents 0.9 1 / 20

	1636T	T20, T25, T30, T40, T45, T50, T55
	1680T	T20, T25, T30, T40, T45, T50, T55
	414810M	

1023EQ

Metal case size (mm) : 244 x 118 x 37 (0.038 cuft)



23
PC.

Contents 1.6 1 / 18

	1636E	10IP, 15IP, 20IP, 25IP, 27IP, 30IP, 40IP, 45IP, 50IP, 55IP, 60IP
	1680E	10IP, 15IP, 20IP, 25IP, 27IP, 30IP, 40IP, 45IP, 50IP, 55IP, 60IP
	414810M	

1042CQ

Metal case size (mm) : 205 x 80 x 42 (0.024 cuft)




42
PC.

Contents 0.52 1 / 20

	1025H	H1.5, H2, H2.5, H3, H4, H5, H6, H7, H8, H10
	1025T	T6
	1025U	T7H, T8H, T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H
	1025S	3x0.5, 3.5x0.6, 4x0.5, 4.5x0.6, 5x0.8, 5.5x0.8, 6x1.0, 6.5x1.2, 7x1.2, 8x1.2
	1025P	PH0, PH1, PH2, PH3
	1025Z	PZ1, PZ2, PZ3
	1025R	RB0, RB1, RB2, RB3

1043CQ

Metal case size (mm) : 290 x 130 x 41 (0.056 cuft)

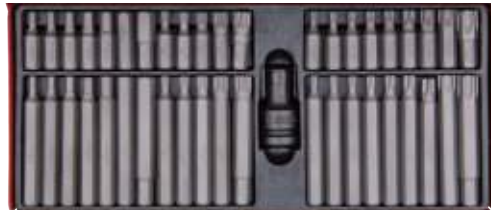

43
PC.

Contents 2.5 1 / 10

	1636H	H4, H5, H6, H7, H8, H10, H12
	1636M	M5, M6, M8, M10, M12
	1636T	T20, T25, T27, T30, T40, T45, T50, T55, T60
	1680H	H4, H5, H6, H7, H8, H10, H12
	1680M	M5, M6, M8, M10, M12
	1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60
	414710M	

1044CQ

Metal case size (mm) : 296 x 130 x 41 (0.056 cuft)



44
PC.

Contents 2.5 1 / 10

	1636H	H4, H5, H6, H7, H8, H10, H12
	1636M	M5, M6, M8, M10, M12
	1636T	T20, T25, T27, T30, T40, T45, T50, T55, T60
	1680H	H4, H5, H6, H7, H8, H10, H12
	1680M	M5, M6, M8, M10, M12
	1680T	T20, T25, T27, T30, T40, T45, T50, T55, T60
	314810M, 414810M	



Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

5169PR

Metal case size (mm) : 445 x 187 x 50 (0.147 cuft)

69
PC.

Contents

Kg 4.15 1 / 4

		3375M	E4, E5, E6, E7, E8, E10, E11, E12, E14, E16, E18
		1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H
		1636H	H4, H5, H6, H7, H8, H10, H12
		1636M	M5, M6, M8, M10, M12
		1636T	T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, T60
		1680H	H4, H5, H6, H7, H8, H10, H12
		1680M	M5, M6, M8, M10, M12
		1680T	T10, T15, T20, T25, T27, T30, T40, T45, T50, T55, T60
		314810M	3792 3779-08G




Ratchet Screwdriver & Set

2166DF

1/4"

- Two position L-handle design for greater torque
- PC+TPR Handle

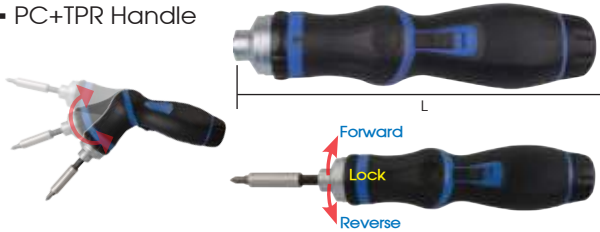

KT NO.	Gear	Overall Length (mm)	Kg	
2166DF	46 teeth	167	0.28	6 / 72

2555MR

1/4"

- Ratchet screwdriver set
- Blow case size (mm) : 260 x 160 x 64 (0.094 cuft)



55
PC.

32809MR

- 9-in-1 ratchet screwdriver set
- Reversible ratchet with 1/4" bit holder

9
PC.



Contents

Kg 0.32 6 / 72

		1025S	4.0, 5.0
		1025P	PH1, PH2, PH3
		1025Z	PZ1, PZ2
		750-60	
		2166DF	

Contents

Kg 1.0 1 / 10

		1025S	3.0, 4.0, 4.5, 5.0, 5.5, 6.0, 6.5, 8.0
		1025P	PH0, PH1, PH2, PH3
		1025Z	PZ0, PZ1, PZ2, PZ3
		1025T	T10, T15, T20, T25, T27, T30, T40
		1025H	H2, H2.5, H3, H4, H5, H6, H8
		1025U	T10, T15, T20, T25, T27, T30, T40
		1025R	RB1, RB2
		7702-25	
		750-60	
		2335M	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14
		2166DF	

Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

1032CQ

Plastic case size (mm) :
120 x 70 x 42 (0.012 cuft)

32
PC.



Contents		0.3	1 / 20
⊖	1025S	3.0, 4.0, 5.0, 6.0	
⊕	1025P	PH1, PH2 x 2, PH3	
⊗	1025Z	PZ1, PZ2 x 2, PZ3	
⊛	1025T	T10, T15, T20, T25, T27, T30, T40	
●	1025H	H3, H4, H5, H6	
⊛	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H	
■	7702-25		
○	753-63		

1032CQ01

Plastic case size (mm) :
120 x 70 x 42 (0.012 cuft)

33
PC.



Contents		0.3	1 / 20
⊖	1025S	3.0, 4.0, 5.0, 6.0	
⊕	1025P	PH1, PH2 x 2, PH3	
⊗	1025Z	PZ1, PZ2 x 2, PZ3	
⊛	1025T	T10, T15, T20, T25, T27, T30, T40	
●	1025H	H3, H4, H5, H6	
⊛	1025U	T10H, T15H, T20H, T25H, T27H, T30H, T40H	
■	1025R	RB2	
■	7702-25		
○	753-63		

1050CQ

Blow case size (mm) :
224 x 110 x 54 (0.047 cuft)

50
PC.



Contents		0.53	1 / 20
⊖	1025S	4.0 x 2, 5.5 x 2, 6.5 x 2	
⊕	1025P	PH1 x 2, PH2 x 2, PH3 x 2	
⊗	1025Z	PZ1 x 2, PZ2 x 2, PZ3 x 2	
⊛	1025T	T6, T7, T8, T9, T10, T15, T20, T25, T27, T30, T40 x 2	
●	1025H	H2, H3, H4, H5, H6, H7, H8	
⊛	1025U	T7H, T8H, T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H x 2	
○	750-60		
—	2141		

2517MR

Plastic case size (mm) :
120 x 70 x 32 (0.009 cuft)










17
PC.



Contents		0.23	1 / 28
⊖	1025S	4.0, 5.5, 6.5	
⊕	1025P	PH1, PH2, PH3	
⊛	1025T	T10, T15, T20	
○	2335M	4, 4.5, 5, 5.5, 6, 7mm	
■	7702-25		
○	753-63		



Bit Set

KT NO.	PC.	Contents		
102502P-S1	25	 1025P PH2 x 25 PC.	161	12 / 72
102502Z-S1	25	 1025Z PZ2 x 25 PC.	161	12 / 72
102510T-S1	25	 1025T T10 x 25 PC.	136	12 / 72
102515T-S1	25	 1025T T15 x 25 PC.	140	12 / 72
102520T-S1	25	 1025T T20 x 25 PC.	142	12 / 72
102525T-S1	25	 1025T T25 x 25 PC.	144	12 / 72
102530T-S1	25	 1025T T30 x 25 PC.	146	12 / 72



Power Bit Pocket Case


PAT.




- Shockproof high quality materials



- Functional design free slide open pocket storage case.



- Flexible for different length of power bit

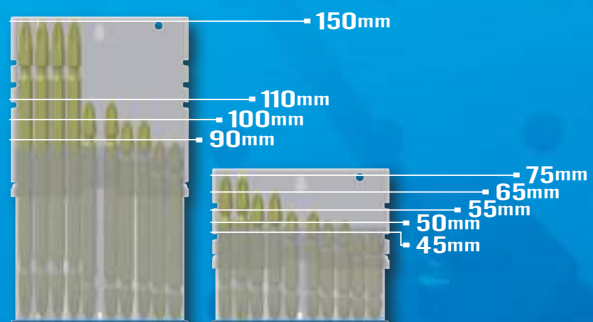

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic

1/4" Hex size shank driver



order unit : one blister card

7100P

- Short neck (9.5 mm) type
- DIN ISO 2351-2



KT NO.	⊕ No.	Overall length (mm)	⚖	📦 / 📦
71500P	PH0	50	8	10 / 100
715001P	PH1	50	9	
715002P	PH2	50	11	
715003P	PH3	50	11	
715004P	PH4	50	14	
716502P	PH2	65	15	
717001P	PH1	70	16	
717002P	PH2	70	17	
717003P	PH3	70	17	
719001P	PH1	90	18	
719002P	PH2	90	20	
719003P	PH3	90	20	
711002P	PH2	100	24	
711501P	PH1	150	23	
711502P	PH2	150	33	
711503P	PH3	150	33	

7100H

- DIN ISO 2351-3



KT NO.	mm / inch	Overall length (mm)	⚖	📦 / 📦
715002H	H2	50	6	10 / 100
715025H	H2.5	50	6	10 / 100
715003H	H3	50	6	10 / 100
715004H	H4	50	9	10 / 100
715005H	H5	50	10	10 / 100
715006H	H6	50	11	10 / 100
715007H	H7	50	13	10 / 100
715008H	H8	50	17	10 / 100
new 715012SH	3/16	50	20	10 / 100
new 715014SH	7/32	50	22	10 / 100
new 717005H	H5	70	15	10 / 100
new 717006H	H6	70	18	10 / 100
new 717007H	H7	70	21	10 / 100
new 717008H	H8	70	25	10 / 60
711102H	H2	110	11	10 / 100
711125H	H2.5	110	11	10 / 100
711103H	H3	110	14	10 / 100
711104H	H4	110	18	10 / 100
711105H	H5	110	24	10 / 100
711106H	H6	110	29	10 / 100
711107H	H7	110	34	10 / 100
711108H	H8	110	42	10 / 100
711110H	H10	110	62	10 / 80
711505H	H5	150	34	10 / 100
711507H	H7	150	47	10 / 100
new 711512SH	3/16	150	68	10 / 100

7150S


- DIN ISO 2351-1



KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	⚖	📦 / 📦
715003S1	3.0	0.5	50	6	10 / 100
715035S1	3.5	0.5	50	6	
715004S2	4.0	0.5	50	7	
715004S1	4.0	0.8	50	7	
715045S1	4.5	0.6	50	7	
715005S1	5.0	0.8	50	8	
715055S1	5.5	0.8	50	8	
715055S2	5.5	1.0	50	8	
715006S1	6.0	1.0	50	8	
715065S1	6.5	1.2	50	9	

7100T

- For torx head screw



KT NO.	Size	Overall length (mm)	⚖	📦 / 📦
715006T	T6	50	5	10 / 100
715007T	T7	50	5	
715008T	T8	50	5	
715009T	T9	50	5	
715010T	T10	50	6	
715015T	T15	50	6	
715020T	T20	50	7	
715025T	T25	50	8	
715027T	T27	50	9	
715030T	T30	50	9	
715040T	T40	50	10	
715050T	T50	50	15	
717006T	T6	70	7	
717007T	T7	70	7	
717008T	T8	70	7	
717009T	T9	70	7	
717010T	T10	70	8	
717015T	T15	70	8	
717020T	T20	70	10	
717025T	T25	70	11	
717027T	T27	70	14	
717030T	T30	70	14	
717040T	T40	70	15	
711110T	T10	110	14	
711115T	T15	110	14	
711120T	T20	110	18	
711125T	T25	110	19	
711127T	T27	110	24	
711130T	T30	110	24	
711140T	T40	110	28	
711506T	T6	150	16	
711507T	T7	150	16	
711508T	T8	150	16	
711509T	T9	150	16	
711510T	T10	150	17	
711515T	T15	150	18	
711520T	T20	150	24	
711525T	T25	150	24	
711527T	T27	150	32	
711530T	T30	150	33	
711540T	T40	150	39	



Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic **1/4"** Hex size shank driver



order unit : one blister card

7100Z

- DIN ISO 2351-2



KT NO.	No.	Overall length (mm)	⚖️	📦 / 📦
715001Z	PZ1	50	9	10 / 100
715002Z	PZ2	50	11	
715003Z	PZ3	50	12	
717001Z	PZ1	70	11	
717002Z	PZ2	70	15	
717003Z	PZ3	70	15	
719001Z	PZ1	90	13	
719002Z	PZ2	90	19	
719003Z	PZ3	90	19	

7100U

- For torx head screw



KT NO.	Size	Overall length (mm)	⚖️	📦 / 📦
715006U	T6H	50	7	10 / 100
715007U	T7H	50	5	
715008U	T8H	50	5	
715009U	T9H	50	5	
715010U	T10H	50	7	
715015U	T15H	50	7	
715020U	T20H	50	7	
715025U	T25H	50	8	
715027U	T27H	50	9	
715030U	T30H	50	9	
715040U	T40H	50	11	
717010U	T10H	70	8	
717015U	T15H	70	8	
717020U	T20H	70	10	
717025U	T25H	70	11	
717027U	T27H	70	13	
717030U	T30H	70	13	
717040U	T40H	70	15	
711110U	T10H	110	14	
711115U	T15H	110	14	
711120U	T20H	110	18	
711125U	T25H	110	19	
711127U	T27H	110	24	
711130U	T30H	110	24	
711140U	T40H	110	28	

7100R



KT NO.	Size	Overall length (mm)	⚖️	📦 / 📦
715000R	RB0	50	7	10 / 100
715001R	RB1	50	8	
715002R	RB2	50	8	
715003R	RB3	50	8	
717000R	0	70	9	
717001R	1	70	11	
717002R	2	70	13	
717003R	3	70	13	

2128PR

- torx head tamper & L-type holder set



8 PC.

Contents 0.17 10 / 60

	7170U	T10H, T15H, T20H, T25H, T27H, T30H, T40H
	158902ERA	

2138PR

- Hexagon head power bits & L-type holder set



8 PC.

Contents 0.24 10 / 60

	7150H	H2, H3, H4, H5, H6, H7, H8
	158902ERA	

7400P

- Short head type



KT NO.	No.	Overall length (mm)	⚖️	📦 / 📦
745002P	PH2	50	11	10 / 100
747501P	PH1	75	16	10 / 100
747502P	PH2	75	15	10 / 100
747503P	PH3	75	16	10 / 100
741002P	PH2	100	23	10 / 100
741502P	PH2	150	37	10 / 100
742002P	PH2	200	50	10 / 100
743002P	PH2	300	70	10 / 100
new 743003P	PH3	300	77	10 / 40

7300P

- Long head type



KT NO.	No.	Overall length (mm)	⚖️	📦 / 📦
734501P	PH1	45	9	10 / 100
734502P	PH2	45	9	
734503P	PH3	45	10	
736501P	PH1	65	14	
736502P	PH2	65	14	
736503P	PH3	65	14	
731101P	PH1	110	26	
731102P	PH2	110	26	
731103P	PH3	110	26	
731502P	PH2	150	32	
731503P	PH3	150	33	



5mm Hex size shank driver order unit : one box

Insert Size: The suggested size is according to the depth of bit holder which a bit is inserted.

7200P

- Long head typed



KT NO.	No.	Overall length (mm)	⚖️	📦 / 📦
726502P	PH2	65	8	10 / 100
727502P	PH2	75	10	
721102P	PH2	110	14	

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic **1/4"** Hex size shank driver
- 2 PC. bits set



order unit : one blister card

7100P-S1 new

- Short neck (9.5 mm) type
- DIN ISO 2351-2



KT NO.	⊕ No.	Overall length (mm)	g	set / box
715000P-S1	PH0	50	16	1 / 20
715001P-S1	PH1	50	18	
715002P-S1	PH2	50	22	
715003P-S1	PH3	50	22	
715004P-S1	PH4	50	28	
716502P-S1	PH2	65	30	
717001P-S1	PH1	70	32	
717002P-S1	PH2	70	34	
717003P-S1	PH3	70	34	
719001P-S1	PH1	90	36	
719002P-S1	PH2	90	40	
719003P-S1	PH3	90	40	
711002P-S1	PH2	100	48	
711501P-S1	PH1	150	46	
711502P-S1	PH2	150	66	
711503P-S1	PH3	150	66	

7100H-S1 new

- DIN ISO 2351-3



KT NO.	mm / inch	Overall length (mm)	g	set / box
715002H-S1	H2	50	12	1 / 20
715025H-S1	H2.5	50	12	
715003H-S1	H3	50	12	
715004H-S1	H4	50	18	
715005H-S1	H5	50	20	
715006H-S1	H6	50	22	
715007H-S1	H7	50	26	
715008H-S1	H8	50	34	
715012SH-S1	3/16	50	20	
715014SH-S1	7/32	50	22	
717005H-S1	H5	70	30	
717006H-S1	H6	70	36	
717007H-S1	H7	70	42	
711102H-S1	H2	110	22	
711125H-S1	H2.5	110	22	
711103H-S1	H3	110	28	
711104H-S1	H4	110	36	
711105H-S1	H5	110	48	
711106H-S1	H6	110	58	
711107H-S1	H7	110	68	
711505H-S1	H5	150	68	
711507H-S1	H7	150	94	
711512SH-S1	3/16	150	68	

7150S-S1 new

- DIN ISO 2351-1



KT NO.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)	g	set / box
715003S1-S1	3.0	0.5	50	12	1 / 20
715035S1-S1	3.5	0.5	50	12	
715004S2-S1	4.0	0.5	50	14	
715004S1-S1	4.0	0.8	50	14	
715045S1-S1	4.5	0.6	50	14	
715005S1-S1	5.0	0.8	50	16	
715055S1-S1	5.5	0.8	50	16	
715055S2-S1	5.5	1.0	50	16	
715006S1-S1	6.0	1.0	50	16	
715065S1-S1	6.5	1.2	50	18	

7100T-S1 new

- For torx head screw



KT NO.	Size	Overall length (mm)	g	set / box
715006T-S1	T6	50	10	1 / 20
715007T-S1	T7	50	10	
715008T-S1	T8	50	10	
715009T-S1	T9	50	10	
715010T-S1	T10	50	12	
715015T-S1	T15	50	12	
715020T-S1	T20	50	14	
715025T-S1	T25	50	16	
715027T-S1	T27	50	18	
715030T-S1	T30	50	18	
715040T-S1	T40	50	20	
715050T-S1	T50	50	30	
717006T-S1	T6	70	14	
717007T-S1	T7	70	14	
717008T-S1	T8	70	14	
717009T-S1	T9	70	14	
717010T-S1	T10	70	14	
717015T-S1	T15	70	16	
717020T-S1	T20	70	16	
717025T-S1	T25	70	20	
717027T-S1	T27	70	22	
717030T-S1	T30	70	28	
717040T-S1	T40	70	28	
711110T-S1	T10	110	30	
711115T-S1	T15	110	28	
711120T-S1	T20	110	28	
711125T-S1	T25	110	36	
711127T-S1	T27	110	38	
711130T-S1	T30	110	48	
711140T-S1	T40	110	48	
711506T-S1	T6	150	56	
711507T-S1	T7	150	32	
711508T-S1	T8	150	32	
711509T-S1	T9	150	32	
711510T-S1	T10	150	34	
711515T-S1	T15	150	36	
711520T-S1	T20	150	48	
711525T-S1	T25	150	48	
711527T-S1	T27	150	64	
711530T-S1	T30	150	66	
711540T-S1	T40	150	78	



Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic
- 2 PC. bits set

1/4" Hex size shank driver



order unit : one blister card

7100Z-S1 new

- DIN ISO 2351-2



KT NO.	No.	Overall length (mm)	g	set / box
715001Z-S1	PZ1	50	18	1 / 20
715002Z-S1	PZ2	50	22	
715003Z-S1	PZ3	50	24	
717001Z-S1	PZ1	70	22	
717002Z-S1	PZ2	70	30	
717003Z-S1	PZ3	70	30	
719001Z-S1	PZ1	90	26	
719002Z-S1	PZ2	90	38	
719003Z-S1	PZ3	90	38	

7100U-S1 new

- For torx head screw



KT NO.	Size	Overall length (mm)	g	set / box
715006U-S1	T6H	50	14	1 / 20
715007U-S1	T7H	50	10	
715008U-S1	T8H	50	10	
715009U-S1	T9H	50	10	
715010U-S1	T10H	50	14	
715015U-S1	T15H	50	14	
715020U-S1	T20H	50	14	
715025U-S1	T25H	50	16	
715027U-S1	T27H	50	18	
715030U-S1	T30H	50	18	
715040U-S1	T40H	50	22	
717010U-S1	T10H	70	16	
717015U-S1	T15H	70	16	
717020U-S1	T20H	70	20	
717025U-S1	T25H	70	22	
717027U-S1	T27H	70	26	
717030U-S1	T30H	70	26	
717040U-S1	T40H	70	30	
711110U-S1	T10H	110	28	
711115U-S1	T15H	110	28	
711120U-S1	T20H	110	36	
711125U-S1	T25H	110	38	
711127U-S1	T27H	110	48	
711130U-S1	T30H	110	48	
711140U-S1	T40H	110	56	

7100R-S1 new



KT NO.	Size	Overall length (mm)	g	set / box
715000R-S1	RB0	50	14	1 / 20
715001R-S1	RB1	50	16	
715002R-S1	RB2	50	16	
715003R-S1	RB3	50	16	
717000R-S1	RB0	70	18	
717001R-S1	RB1	70	22	
717002R-S1	RB2	70	26	
717003R-S1	RB3	70	26	

7400P-S1 new

- Short head type



KT NO.	No.	Overall length (mm)	g	set / box
745002P-S1	PH2	50	22	1 / 20
747501P-S1	PH1	75	32	
747502P-S1	PH2	75	30	
747503P-S1	PH3	75	32	
741002P-S1	PH2	100	46	
741502P-S1	PH2	150	74	

7300P-S1 new

- Long head type



KT NO.	No.	Overall length (mm)	g	set / box
734501P-S1	PH1	45	18	1 / 20
734502P-S1	PH2	45	18	
734503P-S1	PH3	45	20	
736501P-S1	PH1	65	28	
736502P-S1	PH2	65	28	
736503P-S1	PH3	65	28	
731101P-S1	PH1	110	52	
731102P-S1	PH2	110	52	
731103P-S1	PH3	110	52	
731502P-S1	PH2	150	64	
731503P-S1	PH3	150	66	



5mm Hex size shank driver order unit : one box

Insert Size: The suggested size is according to the depth of bit holder which a bit is inserted.

7200P-S1 new

- Long head typed



KT NO.	No.	Overall length (mm)	g	set / box
726502P-S1	PH2	65	16	1 / 20
727502P-S1	PH2	75	20	
721102P-S1	PH2	110	28	

Power Driving

- Silicon chrome vanadium alloy steel (S2)
- Nickel plated
- Magnetic 1/4" Hex size shank driver



1300P

- Long head type



KT NO.	⊕ No.	Overall length (mm)		
134501P	PH1	45	8	10 / 300
134502P	PH2	45	9	10 / 300
134503P	PH3	45	9	10 / 300
136501P	PH1	65	14	10 / 200
136502P	PH2	65	14	10 / 200
136503P	PH3	65	14	10 / 200
131101P	PH1	110	26	10 / 150
131102P	PH2	110	26	10 / 150
131103P	PH3	110	26	10 / 150
131501P	PH1	150	36	10 / 100
131502P	PH2	150	36	10 / 100
131503P	PH3	150	37	10 / 100

1500P

- Short head type



KT NO.	⊕ No.	Overall length (mm)		
155001P	PH1	50	10	10 / 300
155002P	PH2	50	10	10 / 300
155003P	PH3	50	10	10 / 300
157501P	PH1	75	16	10 / 200
157502P	PH2	75	16	10 / 200
157503P	PH3	75	17	10 / 200
151001P	PH1	100	23	10 / 150
151002P	PH2	100	23	10 / 150
151003P	PH3	100	23	10 / 150
151501P	PH1	150	36	10 / 100
151502P	PH2	150	37	10 / 100
151503P	PH3	150	37	10 / 100

7300P

- Long head type



KT NO.	⊕ No.	Tip width (mm)	Tip thickness (mm)	Overall length (mm)		
734551P	PH1	5.0	0.8	45	8	10 / 300
734552P	PH2	5.0	0.8	45	8	10 / 300
736552P	PH2	5.0	0.8	65	13	10 / 200
731152P	PH2	5.0	0.8	110	25	10 / 150
731552P	PH2	5.0	0.8	150	36	10 / 100

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, phosphate sunk
- Magnetic 1/4" Hex size shank driver



13A6502P

- Long head type
- For ironwork screws



KT NO.	⊕ No.	Overall length (mm)		
13A6502P	PH2	65	8	10 / 100

13B6502P

- Long head type
- For woodwork screws



KT NO.	⊕ No.	Overall length (mm)		
13B6502P	PH2	65	8	10 / 100

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted
- Magnetic

1/4" Hex size shank driver



750

750-50A

- Magnetic bit holder
- 2 PC. type
- 750-50A: with spring clip
- DIN 7427



KT NO.	⊕ inch	Overall length (mm)		
750-60	1/4	60	20	6 / 84
750-50A	1/4	50	22	6 / 84

KT NO.	⊕ inch	Overall length (mm)		
750-75	1/4	75	30	1 / 20
750-100	1/4	100	37	1 / 20
750-150	1/4	150	50	1 / 20

751

- Magnetic bit holder
- 1 PC. type
- With spring clip
- DIN 7427



KT NO.	⊕ inch	Overall length (mm)		
751-60	1/4	60	24	6 / 84
751-75	1/4	75	36	6 / 84



Power Driving

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted
- Magnetic

752

- Magnetic bit holder
- 2 PC. type
- With quick-release sleeve
- DIN 7427



KT NO.	inch	Overall length (mm)		
752-60	1/4	63	33	6 / 72

KT NO.	inch	Overall length (mm)		
752-75	1/4	75	32	1 / 20
752-100	1/4	100	38	1 / 20
752-150	1/4	150	52	1 / 20
752-300	1/4	300	92	1 / 20

753

- 753-63
- Magnetic bit holder
- 2 PC. type
- With quick-release sleeve
- For 1025 bit
- DIN 7427



753-63

KT NO.	inch	Overall length (mm)		
753-63	1/4	63	33	6 / 72

- 753-370
- Quick release bit holder
- Extra-long extended driver for limited space
- Magnetic bit holder
- For power bits



753-370

KT NO.	inch	Overall length (mm)		
753-370	1/4	370	170	1 / 4

1/4" Hex size shank driver

754

- Universal joint bit holder
- 20 degree pivot mode allows for limited space accessibility
- Can be used in straight or pivot mode



KT NO.	inch	Overall Length (mm)		
754-90	1/4	90	52	1 / 20

755

- Quick release flexible bit holder
- Flexible shaft driver
- The flex shaft accepts any standard hex fitting
- Quick release fits double end power bits and 50mm power bits



KT NO.	inch	Overall length (mm)		
755-300	1/4	300	293	1 / 6
755-400	1/4	400	385	1 / 12


Angle Driver

- The body is zin alloy steel
- The arm is chrome vanadium alloy steel
- The chuck is aluminum alloy steel
- Magnetic

1/4" Hex size shank driver

759

- Heavy duty right angle bit holder
- This heavy duty 90 degree offset driver with 24 position gripped stabilizer arm is designed for use with power drivers 18-24 Volts
- It's head is shorter than 2.5" which is suitable to use in limited space
- Locking magnetic chuck accepts any 1/4" hex drive accessory such as twist drills, spade drills, step drills, grinding stones, buffer pads, nut drivers and screwdriver bits
- Durable all metal housing and steel gears with ball bearing construction
- Gripped stabilizer arm with 1 screwdriver bit storage
- It's amazing capacity for up to 500 inch lbs with 2000 RPM

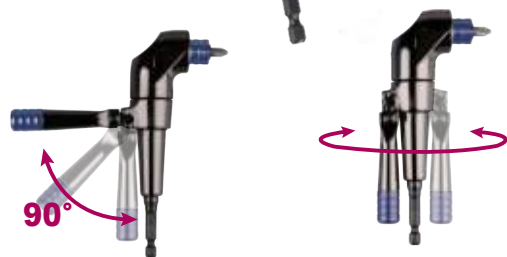

Pressure to change angle

24 position gripped stabilizer arm design

KT NO.	inch	Overall length (mm)		
759-140	1/4	140	305	12 / 48

Power Driving


- Chrome vanadium alloy steel
- Anti-rust oiled, sand-blasted

1/4" Hex size shank driver



75A1

- Threaded rod socket
- Fastest tool available to tighten or loosen threaded rods
- Automatic locking cams
- Will not damage the threads when used properly

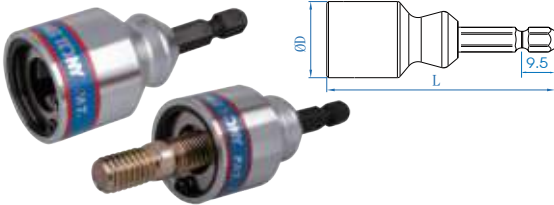


KT NO.	Size mm	inch	D mm	L mm	Capacity Ø mm			
75A105M	5	3/16	22	66	4.6~5.0	60	10	200
75A106M	6	1/4	24	66	5.6~6.35	75	10	200
75A108M	8	5/16	24	66	7.6~8.0	74	10	200
75A110M	10	3/8	28	66	9.0~10.0	99	10	160
75A112M	12	1/2	28	66	11.4~12.7	98	10	160
75A114M	14	9/16	32	66	13.2~14.3	126	10	160
75A116M	16	5/8	32	66	15.2~16.0	125	10	160

760M

760S

- Nut setter
- Non magnetic type
- DIN 3126



KT NO.	Ø mm	ℓ mm	Overall length (mm)			
NEW 7605512M	12	7.0	55	55	6	72
7606512M	12	6.8	65	50	6	72
7607510M	10	6.0	75	38	6	72


KT NO.	Ø mm	ℓ mm	Overall length (mm)			
7601012M	12	7.5	100	61	1	25
NEW 7601013M	13	7.0	100	70	1	25

KT NO.	Ø inch	ℓ mm	Overall length (mm)			
7606508S	1/4	4.8	65	20	6	84
7606510S	5/16	6.6	65	30	6	84
7606512S	3/8	6.8	65	36	6	72

761M

761S

- Nut setter
- Magnetic type
- DIN 3126



KT NO.	Ø mm	ℓ mm	Overall length (mm)			
7616505M	5	2.3	65	27	6	84
7616506M	6	2.6	65	26	6	84
7616507M	7	2.9	65	25	6	84
7616508M	8	3.5	65	30	6	84
7616510M	10	4.5	65	37	6	72
7616512M	12	5.6	65	52	6	72
7616513M	13	6.0	65	54	6	72
7616514M	14	6.5	65	52	6	20

KT NO.	Ø mm	ℓ mm	Overall length (mm)			
7611006M	6	2.6	100	38	1	25
7611008M	8	3.5	100	48	1	25
7611010M	10	4.5	100	54	1	25
7611012M	12	5.6	100	68	1	25
7611013M	13	6.0	100	71	1	25
7611014M	14	6.5	100	77	1	25
7611506M	6	2.6	150	58	1	25
7611507M	7	2.9	150	65	1	25
7611508M	8	3.5	150	67	1	25
7611510M	10	4.5	150	68	1	25
7611512M	12	5.6	150	103	1	25
7611513M	13	6.0	150	110	1	25
7611514M	14	6.5	150	115	1	25
7612006M	6	2.6	200	78	1	20
7612008M	8	3.5	200	93	1	20
7612010M	10	4.5	200	89	1	20
7612012M	12	5.6	200	128	1	20
7612014M	14	6.5	200	128	1	20

KT NO.	Ø inch	ℓ mm	Overall length (mm)			
7614208S	1/4	2.7	42	15	6	84
7614210S	5/16	3.7	42	17	6	84
7614512S	3/8	4.7	45	22	6	84
7616508S	1/4	4.8	65	30	6	84
7616510S	5/16	6.6	65	31	6	84
7616512S	3/8	6.8	65	37	6	72
7616514S	7/16	6.8	65	39	6	72




Power Driving

- Chrome vanadium alloy steel
- Anti-rust oiled, sand-blasted

76B

- Deep well nut setter
- Deep hole for bolt & nut
- Press-fitted high-durability shank
- Use for tightening step clamp in construction




KT NO.	mm	D1 mm	ℓ mm	d mm	L mm	g	kg
76B808M	8	13	6	6	80	41	15 / 300
76B809M	9	13	6	7	80	40	15 / 300
76B810M	10	15	7	7	80	47	12 / 240
76B811M	11	16	7	9	80	52	12 / 240
76B812M	12	17	8	9	80	57	12 / 240
76B813M	13	18	9	10	80	62	12 / 240
76B814M	14	20	9	12	80	70	12 / 240
76B815M	15	21	10	12	80	77	12 / 240
76B816M	16	22	10	14	80	76	12 / 240
76B817M	17	24	11	14	80	95	12 / 144
76B819M	19	26	13	15	80	112	10 / 120
76B821M	21	28	13	19	80	113	10 / 120
76B822M	22	30	13	19	80	137	10 / 120
76B824M	24	32	13	21	80	146	6 / 96

76C

new

- 110mm length easy to reach at confined spaces
- Extra depth dimension 63mm perfectly go through various bolts
- Press-fit structure with durability socket suitable for 18V power tools
- Ideal for construction assembling, scaffolding and roof work



KT NO.	mm	D1 mm	ℓ mm	d mm	L mm	g	kg
76C1108M	8	14	12	7	110	71	12 / 216
76C1109M	9	14	14	8	110	64	12 / 216
76C1110M	10	15	15	9	110	67	12 / 216
76C1111M	11	17	17	10	110	84	10 / 180
76C1112M	12	17	18	11	110	74	10 / 180
76C1113M	13	18	20	12	110	79	10 / 180
76C1114M	14	20	21	13	110	99	10 / 180
76C1117M	17	24	26	16	110	139	10 / 180
76C1119M	19	26	29	18	110	158	10 / 180
76C1121M	21	28	30	20	110	161	8 / 144
76C1124M	24	32	30	23	110	216	8 / 96

1/4" & 3/8" & 1/2" Hex size shank driver



770

- Socket adapter
- Ball retainer type
- DIN 7428



KT NO.	Size	Overall length (mm)	g	kg
7702-25	1/4"	25	6	20 / 200
7702-50	1/4"	50	13	10 / 100
7702-75	1/4"	75	23	10 / 100
7703-50	3/8"	50	23	6 / 84
7704-50	1/2"	50	24	6 / 72

771


- Socket adapter
- Pin retainer type
- DIN 7428



KT NO.	Size	Overall length (mm)	g	kg
7712-02	1/4"	50	12	10 / 100
7713-02	3/8"	50	23	6 / 84

774


- Bit adapter
- Wobble function provides up to 15° accessibility

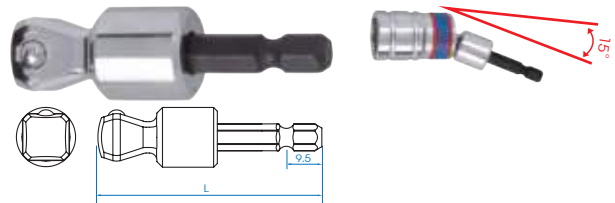

KT NO.	Size	L mm	g	kg
7743-56	3/8"	56	30	6 / 72
7744-60	1/2"	60	42	6 / 72

775

- Universal joint socket adapter
- Universal joint function provides up to 30° accessibility

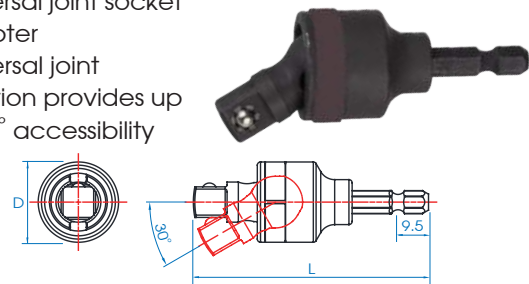

KT NO.	Size	D mm	L mm	g	kg
7753-78	3/8"	25	77	90	6 / 120
7754-85	1/2"	29	85	127	6 / 96

Power Driving Set

1035MR new

1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)



35
PC.

Contents

Kg 0.62 / 1 / 28

	1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
	1025P	PH1 x 2, PH2 x 2 \varnothing 6mm, PH2 \varnothing 4.7mm, PH3
	1025T	T15, T20 x 2, T25 x 2, T30 x 2, T40
	1025H	H3, H4, H5, H6
	1025Z	PZ2 x 2
	7E111	2.5, 3.0, 3.5, 4.0, 5.0
	754-90	1/4"
	7400P	PH2
	761M x 65L	8, 10, 13
	752-60	1/4"

1044MR new

1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)



44
PC.

Contents

Kg 0.63 / 1 / 28

	1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
	1025P	PH1 x 2, PH2 x 2 \varnothing 6mm, PH2 \varnothing 4.7mm, PH3
	1025T	T10, T15, T20 x 2, T25, T27, T30, T40
	1025H	H3, H4, H5, H6
	1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H
	1025Z	PZ2 x 2
	7170T	T15, T20, T25,
	7170P	PH2 x 2
	7170Z	PZ2
	7150S	4.0 x 0.8, 6.0 x 1.0
	761M x 65L	6, 8, 10
	753-63	1/4"

1036MR new

1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)



36
PC.

Contents

Kg 0.59 / 1 / 28

	1025S	3.0 x 0.5, 4.0 x 0.5, 5.0 x 0.8, 6.0 x 1.0
	1025P	PH1 x 2, PH2 x 2 \varnothing 6mm, PH2 \varnothing 4.7mm, PH3
	1025T	T15, T20 x 2, T25 x 2, T30 x 2, T40
	1025H	H3, H4, H5, H6
	1025Z	PZ2 x 2
	7150T	T20, T25, T30
	7150Z	PZ2 x 2
	7150S	5.5 x 0.8
	7450P	PH2 x 2
	761M x 65L	8, 10, 13
	753-63	1/4"

1045MR new

1/4"

Plastic case size (mm) : 150 x 103 x 46 (0.025 cuft)



45
PC.

Contents

Kg 0.64 / 1 / 28

	1025S	4.0 x 0.5, 5.5 x 0.8, 6.5 x 1.2
	1025P	PH2 x 2 \varnothing 4.7mm
	1025T	T10, T15, T20, T25, T27, T30, T35, T40
	1025H	H2, H3, H4, H5, H6
	1025U	T10H, T15H, T20H x 2, T25H, T27H, T30H, T40H
	1025Z	PZ1, PZ2, PZ3
	1025R	RB1, RB2, RB3
	1550P	PH1, PH2 x 2, PH3
	7150P	PH2
	7E111	3, 4, 5
	761M x 65L	8, 10, 13
	750-50A	1/4"
	7702-50	1/4" DR.



Titanium Coated HSS Drill Bit Set

11101SQ

1/4"

- Titanium coated HSS drill set with standard 1/4" hex shank that will fit cordless screwdrivers, hand drills and impact drivers etc. or use in standard drill chuck
- Suitable for use with steel, wood, plastic etc
- Titanium nitride drill bits run cooler, drill smoother and last longer than standard bits
- High speed steel
- 120 deg. tips
- 1/4" hex shank for fast changes

Ø mm	Overall length mm
1.5	62
2	69
2.5	77
3	82
3.2	85
3.5	90
4	95
4.5	100
4.8	105
5	106



10 PC.



Hex Key

- Material - SNCM - V alloy steel
- Finishing - chrome plated

KT No. & D1

1145MR

- Standard arm type
- Allen head
- DIN ISO 2936



1145SR



KT NO.	mm	mm	mm	g	kg
114515MR	H1.5	16	47	1	20 / 400
114502MR	H2	18	52	1	20 / 400
114525MR	H2.5	21	59	3	20 / 400
114503MR	H3	24	66	5	20 / 400
114504MR	H4	30	74	10	20 / 400
114505MR	H5	33	85	18	20 / 400
114555MR	H5.5	36	91	24	10 / 200
114506MR	H6	38	97	30	10 / 200
114507MR	H7	41	102	45	10 / 200
114508MR	H8	44	108	60	10 / 200
114510MR	H10	50	122	105	10 / 200

KT NO.	inch	mm	mm	g	kg
114502SR	1/16	18	49	1	20 / 400
114525SR	5/64	20	52	1	20 / 400
114503SR	3/32	21	56	3	20 / 400
114504SR	1/8	25	63	5	20 / 400
114505SR	5/32	28	70	9	20 / 400
114506SR	3/16	31	77	15	20 / 400
114508SR	1/4	37	91	30	10 / 200
114510SR	5/16	42	106	56	10 / 200
114512SR	3/8	47	120	80	10 / 120
114516SR	1/2	54	146	196	10 / 120
114518SR	9/16	59	160	267	6 / 72
114520SR	5/8	64	175	361	6 / 72
114524SR	3/4	73	203	599	6 / 24

1125MR

- Extra long arm type
- Allen head
- DIN ISO 2936



1125SR



KT NO.	mm	mm	mm	g	kg
112515MR	H1.5	16	92	1	20 / 400
112502MR	H2	18	102	3	20 / 400
112525MR	H2.5	21	115	5	20 / 400
112503MR	H3	23	129	8	20 / 480
112504MR	H4	29	144	18	20 / 300
112505MR	H5	33	165	31	20 / 300
112506MR	H6	38	186	51	20 / 400
112507MR	H7	41	197	78	20 / 240
112508MR	H8	44	208	104	10 / 100
112510MR	H10	50	234	182	10 / 100
112512MR	H12	57	262	290	8 / 48
112514MR	H14	70	294	451	8 / 48
112517MR	H17	80	337	770	4 / 32
112519MR	H19	89	380	863	4 / 16
112522MR	H22	102	422	1590	4 / 16

KT NO.	inch	mm	mm	g	kg
112502SR	1/16	16	92	1	20 / 400
112525SR	5/64	18	102	3	20 / 400
112503SR	3/32	21	115	5	20 / 400
112504SR	1/8	23	129	8	20 / 400
112505SR	5/32	29	144	18	20 / 300
112506SR	3/16	33	165	31	20 / 300
112508SR	1/4	38	186	51	10 / 100
112510SR	5/16	44	208	104	10 / 100
112512SR	3/8	50	234	182	10 / 100
112516SR	1/2	57	262	290	8 / 48
112518SR	9/16	70	294	451	8 / 48

Hex Key Set



KT NO.	PC.	Spec.	Contents		
20218MR	8	knife type	H2, H2.5, H3, H4, H5, H6, H8, H10	0.33	12 / 72
20219MR	9	Standard arm	1145MR H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.33	6 / 48
20219SR	9		1145SR 1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.33	6 / 48
20208MR	8	Extra long arm	1125MR H2, H2.5, H3, H4, H5, H6, H8, H10	0.43	8 / 48
20209MR	9		1125MR H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.49	8 / 48
20209SR02	9		1125SR 1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.47	8 / 48

20208MR01

20208SR01



8
PC.

KT NO. Spec. Contents 1.25 1 / 20

KT NO.	Spec.	Contents
20208MR01	Extra long arm	1125MR H3, H4, H5, H6, H8, H10, H12, H14
20208SR01	arm	1125SR 1/8, 5/32, 3/16, 1/4, 5/16, 3/8, 1/2, 9/16

20210MR

Metal case size (mm) :
372 x 153 x 40 (0.08 cuft)

10
PC.



Spec.	Contents	3.03 1 / 6
Extra long arm	1125MR H3, H4, H5, H6, H7, H8, H10, H12, H14, H17	

Spline L- wrench & Set

1146MR

- Standard arm type
- For spline head screw



KT NO.	Size	mm	mm		
114605MR	M5	29	83	15	20 / 320
114606MR	M6	33	90	24	20 / 320
114608MR	M8	39	98	47	10 / 300
114610MR	M10	44	111	83	10 / 200
114612MR	M12	53	126	127	10 / 180

1126MR

- Extra long arm type



KT NO.	Size	mm	mm		
112605MR	M5	33	165	28	20 / 300
112606MR	M6	38	186	46	20 / 300
112608MR	M8	44	208	90	10 / 100
112610MR	M10	50	234	159	10 / 100
112612MR	M12	53	264	237	10 / 80

20505PR01

20515PR01

KT No. & D1

5
PC.



20505PR01

20515PR01

KT NO.	Spec.	Contents		
20505PR01	Standard arm type	1146MR M5, M6, M8, M10, M12	0.333	6 / 54
20515PR01	Extra long arm type	1126MR M5, M6, M8, M10, M12	0.632	4 / 32



Ball Hex Key

- Material - SNCM - V alloy steel
- Finishing - chrome plated

KT No. & DT



1130MR

- Long arm with ball point type
- DIN ISO 2936

1130SR



KT NO.	mm	mm	mm		
113015MR	H1.5	16	64	1	20 / 400
113002MR	H2	18	77	2	20 / 400
113025MR	H2.5	21	88	4	20 / 400
113003MR	H3	23	93	7	20 / 400
113004MR	H4	29	104	14	20 / 400
113005MR	H5	33	120	25	20 / 300
113006MR	H6	38	141	41	10 / 160
113008MR	H8	44	158	84	10 / 150
113010MR	H10	50	180	145	10 / 150

KT NO.	inch	mm	mm		
113002SR	1/16	16	79	1	20 / 400
113025SR	5/64	18	85	4	20 / 400
113003SR	3/32	21	88	3	20 / 400
113004SR	1/8	23	93	7	20 / 400
113005SR	5/32	29	104	14	20 / 400
113006SR	3/16	33	120	24	20 / 300
113007SR	7/32	36	130	33	10 / 150
113008SR	1/4	38	141	44	10 / 150
113010SR	5/16	44	158	82	10 / 150
113012SR	3/8	50	180	138	10 / 150

1120MR

- Extra long arm with ball point type
- DIN ISO 2936



KT NO.	mm	mm		
112015MR	H1.5	16	92	1
112002MR	H2	18	102	3
112025MR	H2.5	21	115	5
112003MR	H3	23	129	8
112004MR	H4	29	144	18
112005MR	H5	33	165	31
112006MR	H6	38	186	51
112007MR	H7	41	197	78
112008MR	H8	44	208	104
112010MR	H10	50	234	182

Ball Hex Key Set



KT NO.	PC.	Spec.	Contents			
20107MR01	7	Long arm / ball	1130MR	H2.5, H3, H4, H5, H6, H8, H10	0.37	10 / 60
20107SR	7		1130SR	3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.36	10 / 60
20108MR	8	Extra long arm / ball	1120MR	H2, H2.5, H3, H4, H5, H6, H8, H10	0.43	8 / 48
20109MR	9		1120MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.49	8 / 48
20110MR	9	Long arm / ball	1130MR	H1.5, H2, H2.5, H3, H4, H5, H6, H8, H10	0.39	6 / 60
20129SR	9		1130SR	1/16, 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	0.39	6 / 60

Star L- wrench

- Material - SNCM - V alloy steel
- Finishing - chrome plated

KT No. & D1



1143R

- Standard arm type
- For torx head screw



KT NO.	Size	mm	mm		
114310R	T10	19	49	3	20 / 400
114315R	T15	20	57	5	20 / 400
114320R	T20	23	62	8	20 / 400
114325R	T25	25	70	11	20 / 400
114327R	T27	29	77	15	20 / 400
114330R	T30	35	86	24	10 / 200
114340R	T40	42	97	39	10 / 200
114345R	T45	47	110	57	10 / 200
114350R	T50	50	124	80	10 / 200

1123R


- Extra long arm type
- For torx head screw



KT NO.	Size	mm	mm		
112310R	T10	18	92	5	20 / 400
112315R	T15	20	103	8	20 / 400
112320R	T20	22	115	12	20 / 400
112325R	T25	25	130	18	20 / 300
112327R	T27	29	146	25	20 / 300
112330R	T30	35	165	42	20 / 300
112340R	T40	40	182	63	10 / 100
112345R	T45	45	202	92	10 / 100
112350R	T50	49	225	130	10 / 100

1147R

- Standard arm type
- Tamper resistant type
- For torx head screw



KT NO.	Size	mm	mm		
114710R	T10H	18	50	3	20 / 400
114715R	T15H	20	56	5	20 / 400
114720R	T20H	24	62	8	20 / 400
114725R	T25H	26	68	11	20 / 400
114727R	T27H	30	76	15	20 / 400
114730R	T30H	36	86	24	10 / 200
114740R	T40H	41	97	39	10 / 200
114745R	T45H	46	107	57	10 / 200
114750R	T50H	52	122	80	10 / 200

1127R

- Extra long arm type
- Tamper resistant type
- For torx head screw



KT NO.	Size	mm	mm		
112710R	T10H	18	92	5	20 / 400
112715R	T15H	20	103	8	20 / 400
112720R	T20H	22	115	12	20 / 400
112725R	T25H	25	130	17	20 / 300
112727R	T27H	29	146	24	20 / 300
112730R	T30H	35	165	40	20 / 300
112740R	T40H	40	182	61	10 / 100
112745R	T45H	45	202	89	10 / 100
112750R	T50H	49	225	126	10 / 100

Paper Display Stand for Hex Key Wrench Set

87119

- Capacity : 12 sets
- For allen, spline, ball, torx with hole, ex:
 - (1) 20309PR, 20409PR
 - (2) 20108MR, 20109MR, 20319PR, 20419PR, 20208MR, 20209MR
 - (3) 20107MR01, 20107SR, 20219MR, 20307PR, 20407PR, 20308PR
 - (4) 20218MR, 20505PR, 20515PR
- Size: 393 x 154 x 345 mm
- 0.47g / CUFT 49.4



Star L- wrench Set













knife type



Standard arm



Extra long arm

KT NO.	PC.	Spec	Contents		
20307PR	7	Standard arm  1143R	T10, T15, T20, T25, T27, T30, T40	0.13	15 / 120
20407PR	7	Standard arm / Tamper resistant  1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H	0.13	15 / 120
20308PR	8	knife type 	T9, T10, T15, T20, T25, T27, T30, T40	0.20	12 / 72
20318PR	8	knife type 	T9H, T10H, T15H, T20H, T25H, T27H, T30H, T40H	0.20	12 / 72
20309PR	9	Standard arm  1143MR	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.3	6 / 48
20319PR	9	Extra long arm  1123R	T10, T15, T20, T25, T27, T30, T40, T45, T50	0.45	8 / 48
20409PR	9	Standard arm / Tamper resistant  1147R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H	0.34	6 / 48
20419PR	9	Extra long arm / Tamper resistant  1127R	T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H	0.47	8 / 48





Bicycle Repair Tool

20A16MR

- 16-in-1 bicycle repair tool set

Contents



-  H2, H2.5, H3, H4, H5, H6
-  8, 9, 10 mm
-  PH2
-  5.0

Spoke Wrench: 14GE

Extension bar 1/4" DR

Wrench : 8 / 10 / 15 mm








20A17MR

- 20-in-1 bicycle repair tool set

Contents



-  H2, H2.5, H3, H4, H5, H6
-  9, 10, 12, 13, 15
-  PH2
-  5.0
-  Socket : 8mm

Spoke Wrench: 14GE / 15GE / 0.136"

Chain Wrench x 1

Tire Lever x 2



Aluminum Folding Hex Key Wrench Set

20317MR

- 7-in-1 aluminum folding hex key wrench set



Spec	Contents	Weight	Quantity
knife type	● H1.5, H2, H2.5, H3, H4, H5, H6	90	10 / 200

Aluminum Folding Tool Set

20306PR

- 6-in-1 aluminum folding tool set



Spec	Contents	Weight	Quantity
knife type	● H3, H4, H5, H6 ⊕ PH2 ⊖ 5.0	104	12 / 72

L- type Wrench

1160MR

- Hexagon with ball point head

KT NO.	Size (mm)	Length (mm)	Width (mm)	Weight (g)	Quantity
116002MR	H2	95	145	19	10 / 200
116025MR	H2.5	95	145	21	10 / 200
116003MR	H3	95	145	25	10 / 200
116004MR	H4	95	145	32	10 / 200
116005MR	H5	150	215	74	10 / 200
116006MR	H6	150	215	92	10 / 200
116007MR	H7	150	215	120	10 / 200
116008MR	H8	200	280	212	10 / 80
116010MR	H10	200	280	289	10 / 80

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip




KT No. & D1



1163R


- For torx internal screw
- Tamper resistant type

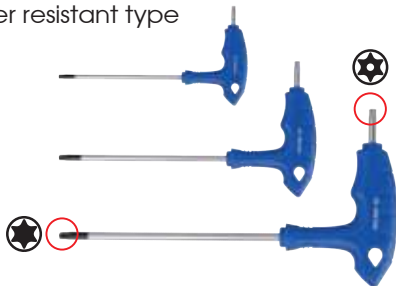

KT NO.	Size	Length (mm)	Width (mm)	Weight (g)	Quantity
116310R	T10H	95	145	24	10 / 200
116315R	T15H	95	145	27	10 / 200
116320R	T20H	95	145	31	10 / 200
116325R	T25H	95	145	35	10 / 200
116327R	T27H	150	215	69	10 / 200
116330R	T30H	150	215	86	10 / 200
116340R	T40H	150	215	105	10 / 200
116345R	T45H	200	280	181	10 / 80
116350R	T50H	200	280	214	10 / 80

1165MR

- For hexagon head screw

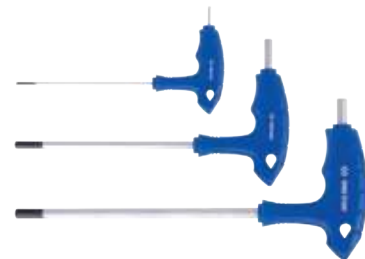

KT NO.	Size (mm)	Length (mm)	Width (mm)	Weight (g)	Quantity
116502MR	H2	95	145	19	10 / 200
116525MR	H2.5	95	145	21	10 / 200
116503MR	H3	95	145	25	10 / 200
116504MR	H4	95	145	32	10 / 200
116505MR	H5	150	215	74	10 / 200
116506MR	H6	150	215	92	10 / 200
116507MR	H7	150	215	120	10 / 200
116508MR	H8	200	280	212	10 / 80
116510MR	H10	200	280	289	10 / 80



L- type Wrench Set



KT NO.	PC.	Spec	Contents		
22106MR	6	Ball & hex two way type	1160MR H3, H4, H5, H6, H7, H8	0.68	1 / 20
22108MR	8		1160MR H2, H2.5, H3, H4, H5, H6, H8, H10	0.97	1 / 10
22208MR	8	Hex head	1165MR H2, H2.5, H3, H4, H5, H6, H8, H10	0.97	1 / 10
22306PR	6	torx head / Tamper resistant	1163R T10H, T15H, T20H, T25H, T30H, T40H	0.46	1 / 20
22309PR	9		1163R T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H	1.00	1 / 10
22118MR	8	Hex head	1160MR H2, H2.5, H3, H4, H5, H6, H8, H10	1.10	1 / 12
22218MR	8		1165MR H2, H2.5, H3, H4, H5, H6, H8, H10	1.10	1 / 12
22319PR	9	torx head / Tamper resistant	1163R T10H, T15H, T20H, T25H, T27H, T30H, T40H, T45H, T50H	1.12	1 / 12

T - type Wrench

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip



KT No. & D1

1150MR



- Hexagon with ball point head

1155MR

- Hexagon head

1155SR



KT NO.						
	mm	mm	mm	mm		
115002MR	H2	100	137	90	28	10 / 200
115025MR	H2.5	100	137	90	30	10 / 200
115003MR	H3	100	137	90	32	10 / 200
115004MR	H4	100	137	90	38	10 / 200
115005MR	H5	150	188	100	65	10 / 200
115006MR	H6	150	188	100	79	10 / 200
115008MR	H8	200	240	120	159	10 / 120
115010MR	H10	200	240	120	217	10 / 120

KT NO.						
	mm / inch	mm	mm	mm		
115502MR	H2	100	137	90	28	10 / 200
115525MR	H2.5	100	137	90	30	10 / 200
115503MR	H3	100	137	90	32	10 / 200
115504MR	H4	100	137	90	38	10 / 200
115505MR	H5	150	188	100	65	10 / 200
115506MR	H6	150	188	100	79	10 / 200
115508MR	H8	200	240	120	159	10 / 120
115510MR	H10	200	240	120	217	10 / 120
115525SR	5/64	100	137	90	28	10 / 200
115503SR	3/32	100	137	90	30	10 / 200
115504SR	1/8	100	137	90	32	10 / 200
115505SR	5/32	100	137	90	38	10 / 200
115506SR	3/16	150	188	100	65	10 / 200
115508SR	1/4	150	188	100	79	10 / 200
115510SR	5/16	200	240	120	159	10 / 120
115512SR	3/8	200	240	120	217	10 / 120

T - type Wrench & Set

- Material - SNCM - V alloy steel
- Finishing - chrome plated with black tip



KT No. & D1

1153R

- For torx head screw



KT NO.	Size	mm	mm	mm	kg	kg
115310R	T10	100	137	90	40	10 / 200
115315R	T15	100	137	90	40	10 / 200
115320R	T20	100	137	90	40	10 / 200
115325R	T25	100	137	90	40	10 / 200
115327R	T27	150	188	100	73	10 / 200
115330R	T30	150	188	100	74	10 / 200
115340R	T40	150	188	100	88	10 / 200
115345R	T45	200	240	120	173	10 / 120
115350R	T50	200	240	120	173	10 / 120

11A3R

- For torx head screw



KT NO.	Size	mm	mm	mm	kg	kg
11A310R	T10	200	237	90	53	12 / 192
11A315R	T15	200	237	90	53	12 / 192
11A320R	T20	200	237	90	53	12 / 192
11A325R	T25	200	237	90	53	12 / 192
11A327R	T27	200	238	100	86	10 / 160
11A330R	T30	200	238	100	86	10 / 160
11A340R	T40	200	238	100	105	10 / 160



KT NO.	PC.	Spec	Contents	kg	kg
21108MR	8	Ball hex type	1150MR H2, H2.5, H3, H4, H5, H6, H8, H10	1.1	1 / 12
21208MR	8	Hexagon type	1155MR H2, H2.5, H3, H4, H5, H6, H8, H10	1.1	1 / 12
21208SR	8		1155SR 5/64, 3/32, 1/8, 5/32, 3/16, 1/4, 5/16, 3/8	1.1	1 / 12
21309PR	9	torx head type	1153R T10, T15, T20, T25, T27, T30, T40, T45, T50	1.2	1 / 12

T - handle Wrench

- Material - Chrome vanadium steel
- Finishing - chrome plated



KT No. & D1

1195M

- 6 Point
- For hexagon head screw
- The handle pin can be removed for another wrench

KT NO.	mm	mm	mm	kg	kg
119502M	H2	64	127	22	10 / 200
119525M	H2.5	64	127	22	10 / 200
119503M	H3	64	127	23	10 / 200
119504M	H4	90	181	62	10 / 200
119505M	H5	90	182	65	10 / 200
119506M	H6	105	210	120	6 / 48
119508M	H8	124	250	224	4 / 32
119510M	H10	145	300	386	5 / 50



Torx Screwdriver



Wing Handle torx Screwdriver & Set

1153A




KT NO.	Size	mm	mm	mm	g	kg
1153A05R	T5	45	84	35	6	20 / 200
1153A06R	T6	45	84	35	6	20 / 200
1153A07R	T7	45	84	35	6	20 / 200
1153A08R	T8	45	84	35	6	20 / 200
1153A09R	T9	45	84	35	9	20 / 200
1153A10R	T10	45	84	35	9	20 / 200
1153A15R	T15	45	84	35	9	20 / 200
1153A20R	T20	45	84	35	9	20 / 200

23308PR



Contents

264 1 / 20




1153A

T5, T6, T7, T8, T9, T10, T15, T20

Flag Handle torx Screwdriver & Set

1163A

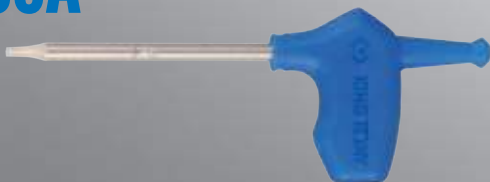


KT NO.	Size	mm	mm	mm	g	kg
1163A05R	T5	45	84	31	7	20 / 200
1163A06R	T6	45	84	31	7	20 / 200
1163A07R	T7	45	84	31	7	20 / 200
1163A08R	T8	45	84	31	7	20 / 200
1163A09R	T9	45	84	31	9	20 / 200
1163A10R	T10	45	84	31	9	20 / 200
1163A15R	T15	45	84	31	9	20 / 200
1163A20R	T20	45	84	31	9	20 / 200

24308PR



Contents

272 1 / 20



1163A

T5, T6, T7, T8, T9, T10, T15, T20

Notes



A series of horizontal dashed lines for writing notes, spanning the width of the page.